




ENGINE PERFORMANCE CURVE

Rating: M3 - 200hp (149kW) @ 2500 RPM
 Application: Marine

PowerTech™ 4.5L Engine
 Model: 4045AFM85

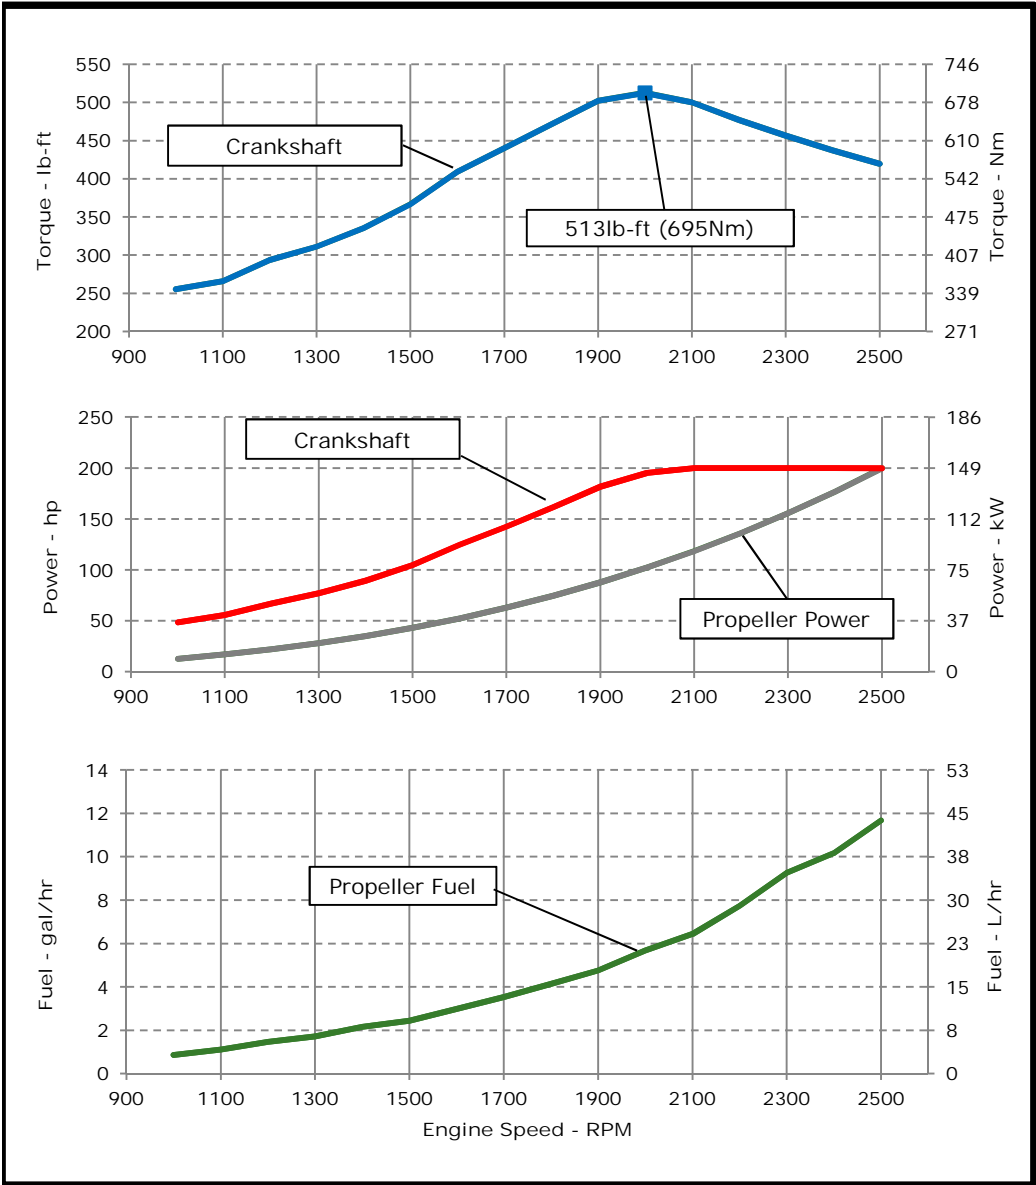

REFERENCE CONDITIONS

Air Intake Restriction..... 12 in.H₂O (3 kPa)
 Exhaust Back Pressure..... 30 in.H₂O (7.5 kPa)

Rated speed and power
 Gross power guaranteed within ±5% at SAE J1995 and ISO 3046
 J1995 and ISO 3046 conditions:

- 77 °F (25 °C) air inlet temperature
- 29.31 in.Hg (99 kPa) barometric pressure
- 104 °F (40 °C) fuel inlet temperature
- 0.853 fuel specific gravity @ 60 °F (15.5 °C)

Ambient air temperature is defined to be the temperature of ambient air close to operating vessel that is not influenced in any manner by operating characteristics of the vessel (free field temp).

Conversion factors:

- Power: kW = hp x 0.746
- Fuel: 1 gal = 7.1 lb, 1 L = 0.85 kg
- Torque: N·m = lb-ft x 1.356

All values from currently available data. Subject to manufacturing and measurement variations and to change without notice.
 Actual performance is subject to application and operation conditions outside of John Deere control.

Notes:

M3: The M3 rating is for marine propulsion applications that typically operate between 2,000-4,000 hours per year and have load factors up to 50 percent. This rating is for applications that use full power for no more than 4 hours out of each 12 hours of operation. The remaining time of operation is at or below cruising speed.

Possible applications: Coastal fishing boats offshore crew boats, research boats. Short range ferryboats and dinner cruise boats.

Designed/Calibrated to meet:

- EPA Commercial Marine Tier 3
- IMO MARPOL Annex VI Compliant
- NRMM (97/68/EC), as amended

Ref: Engine Emission Label

Certified by:

Adam Paul

Performance Curve: 4045AFM85_C

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

Engine Installation Criteria

General Data

Model	4045AFM85		
Number of Cylinders	4		
Bore	107 mm	4.21 in	
Stroke	127 mm	5.00 in	
Displacement	4.5 L	273 in ³	
Compression Ratio	16.7:1		
Valves per Cylinder, Intake/Exhaust	2/2		
Combustion System	Direct injection		
Firing Order	1-3-4-2		
Engine Type	In line, 4 Cycle		
Aspiration	Turbocharged and Aftercooled		
Aftercooling System	Engine coolant		
Engine Crankcase Vent System	Closed		

Cooling System*

Engine Coolant Heat Rejection**	160 kW	9107 BTU/min
Max. Pressure Drop Across Keel Cooler	40 kPa	5.8 psi
Coolant Flow	215 L/min	57 gal/min
Seawater Flow (heat exchanged)	238 L/min	63 gal/min
Thermostat Start to Open	71 °C	160 °F
Thermostat Fully Open	83 °C	182 °F
Engine Coolant Capacity, HE	17 L	4.4 gal
Engine Coolant Capacity, KC	20 L	5.2 gal
Min. Coolant Fill Rate	12 L/min	3.2 gal/min
Min. Pressure Cap	110.3 kPa	16 psi
Min. Pump Inlet Pressure	30 kPa	4.4 psi
Max. External Coolant Restriction	40 kPa	5.8 psi
Normal Operation Max Top Tank Temperature	100 °C	212 °F
≤ 5% of Total Operating Time Top Tank Temperature	100-110 °C	212-230 °F
Absolute Max Top Tank Temperature	110 °C	230 °F
Recommended Fuel Cooler	8 kW	454 BTU/min
Engine Radiated Heat	22 kW	1263 BTU/min

* The cooling system should be capable of typical at ambient up to the maximum conditions in which the vessel will operate.

Typical operation is defined as the average load sustainable in the vessel over 10 min.

** Reference 32 °C Sea Water Temperature

Physical Data

Length to rear face of block	752 mm	29.6 in
Length maximum	1105 mm	43.5 in
Width maximum	770 mm	30.3 in
Height, crank centerline to top	654 mm	25.7 in
Height, crank centerline to bottom	310 mm	310 in
Weight, with oil, no coolant (includes engine, flywheel housing, flywheel, and electronics)	578 kg	1274 lb
Center of Gravity Location, X-axis From Rear Face of Block	273 mm	10.8 in
Center of Gravity Location, Y-axis Right of Crankshaft	4.78 mm	0.2 in
Center of Gravity Location, Z-axis Above Crankshaft	227 mm	8.9 in
Max. Allowable Static Bending Moment At Rear Face of Flywheel Housing with 5-G Load	814 Nm	600 lb-ft
Thrust Bearing Load Limit, Forward Continuous	2.2 kN	495 lbf
Thrust Bearing Load Limit, Forward Intermittent	4 kN	899 lbf
Thrust Bearing Load Limit, Rearward Continuous	1 kN	225 lbf
Thrust Bearing Load Limit, Rearward Intermittent	2 kN	450 lbf

Electrical System

Min. Recommended Battery Capacity, 12V @32 °F (0 °C)	925 amps
Min. Recommended Battery Capacity, 24V @32 °F (0 °C)	625 amps
Starter Rolling Current, 12V @32 °F (0 °C)	920 amps
Starter Rolling Current, 24V @32 °F (0 °C)	600 amps
Min. Voltage at ECU during Cranking, 12V	6 volts
Min. Voltage at ECU during Cranking, 24V	10 volts
Max. Allowable Start Circuit Resistance, 12V	0.002 ohms
Max. Allowable Start Circuit Resistance, 24V	0.0012 ohms
Recommended Starter Cable, 12V 100"	#0
Recommended Starter Cable, 24V 100"	#4
Recommended Starter Cable, 12V 200"	#000 or #20
Recommended Starter Cable, 24V 200"	#2
Electrical Component Maximum Temperature Limit	125 °C 257 °F

Performance Curve: 4045AFM85_C

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

Engine Installation Criteria

Fuel System

ECU Description	L14			
Fuel Injection Pump	HPCR			
Governor Type	Electronic			
Volumetric Fuel Consumption	44.2	L/hr	11.7	gal/hr
Mass Fuel Consumption	37.6	kg/hr	83	lb/hr
Total Fuel Volumetric Flow	152	L/hr	40.0	gal/hr
Total Fuel Mass Flow	129	kg/hr	284	lb/hr
Max. Fuel Inlet Restriction*	20	kPa	80	in.H2O
Max. Fuel Inlet Pressure	20	kPa	80	in.H2O
Max Fuel Return Pressure	20	kPa	80	in.H2O
Max. Fuel Height Above Transfer Pump	2.4	m	7.9	ft
Max. Leak-off Return Height	2.4	m	7.9	ft
Max. Fuel Inlet Height Above Fuel Tank Supply	2.4	m	7.9	ft
Normal Operation Fuel Temperature	40	°C	104	°F
Max. Fuel Inlet Temperature	100	°C	212	°F
Min. Recommended Fuel Line Inside Diameter	6.63	mm	0.26	in
Min. Recommended Fuel Line Size	5 (-) AN			
Primary Fuel Filter	10 mic			
Secondary Fuel Filter	2 mic			

Lubrication System

Oil Pressure at Rated Speed	436	kPa	63	psi
Oil Pressure at Low Idle (800rpm)**	213	kPa	31	psi
Max. Crankcase Pressure	2	kPa	8	in.H2O
Maximum Installed Angle, Front Down	0 deg			
Maximum Installed Angle, Front Up	12 deg			
Engine Angularity Limits Any Direction, Continuous***	35 deg			
Engine Angularity Limits Any Direction, Intermittent***	45 deg			

* With clean filters

** With John Deere Plus-50 II™ 15w-40, not applicable with break in oil.

*** With 19CZ option

Air Intake System

Engine Air Flow	14.18	m ³ /min	500.8	ft ³ /min
Intake Manifold Pressure	224.7	kPa	32.6	psi
Manifold Air Temperature	100	°C	212	°F
Maximum Manifold Air Temperature	130	°C	266	°F
Max. Allowable Temperature Rise, Ambient	17	°C	30	°F
Air to Engine Inlet				
Max. Air Intake Restriction, Clean Air Cleaner	3	kPa	12	in.H2O
Max. Air Intake Restriction, Dirty Air Cleaner	6.25	kPa	25	in.H2O
Min. Ventilation Area	0.087	m ²	135	in ²

Performance Data

Rated Power	149	kW	200	hp
Rated Speed	2500 RPM			
Peak Torque Speed	2000 RPM			
Low Idle Speed	600 RPM			
Rated Torque	569	Nm	420	ft-lb
Peak Torque	681	Nm	502	ft-lb
BMEP, Rated	1596	kPa	231	psi
Rated Pferdestärke (metric hp)	203 ps			
Front Drive Capacity, Intermittent	621	Nm	458	lb-ft
Front Drive Capacity, Continuous	621	Nm	458	lb-ft

Exhaust System

Exhaust Flow	31.4	m ³ /min	1109	ft ³ /min
Exhaust Flow @ gas STP	14.5	m ³ /min	512	ft ³ /min
Exhaust Temperature	423	°C	793	°F
Max. Allowable Exhaust Restriction	7.5	kPa	30	in.H2O
Max. Shear on Turbocharger Exhaust Outlet	11	kg	24.3	lb
Max. Bending Moment on Turbocharger Exhaust Outlet	7	Nm	15.4	lb-ft
Min. Exhaust Pipe Diameter, Dry	114.3	mm	4.5	in
Min. Exhaust Pipe Diameter, Wet	127	mm	5.0	in

Performance Curve: 4045AFM85_C

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

Engine Installation Criteria

Engine Performance Data Table

Engine Speed	Crank Power		Crank Torque		* Prop Power		* Prop Fuel		* Prop BSFC
	RPM	kW	hp	Nm	lb-ft	kW	hp	L/hr	gal/hr
2500	149	200	569	420	149	200	44	12	252
2400	149	200	593	437	132	177	39	10	248
2300	149	200	619	457	116	156	35	9	257
2200	149	200	647	477	102	136	29	8	245
2100	149	200	678	500	88	118	24	6	234
2000	146	195	695	513	76	102	21	6	239
1900	135	182	681	502	65	88	18	5	234
1800	120	162	639	471	56	75	16	4	239
1700	106	143	597	440	47	63	13	4	242
1600	93	125	555	409	39	52	11	3	247
1500	78	105	497	367	32	43	9	2	244
1400	67	89	455	335	26	35	8	2	266
1300	57	77	422	311	21	28	6	2	263
1200	50	67	398	294	16	22	6	1	285
1100	42	56	360	266	13	17	4	1	282
1000	36	49	346	255	10	13	3	1	288

* Theoretical 3.0 exponent propeller curve , measured at flywheel

Performance Curve: 4045AFM85_C

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.