




ENGINE PERFORMANCE CURVE

Rating: M1 - 160hp (119kW) @ 2300 RPM
 Application: Marine

PowerTech™ 4.5L Engine
 Model: 4045AFM85

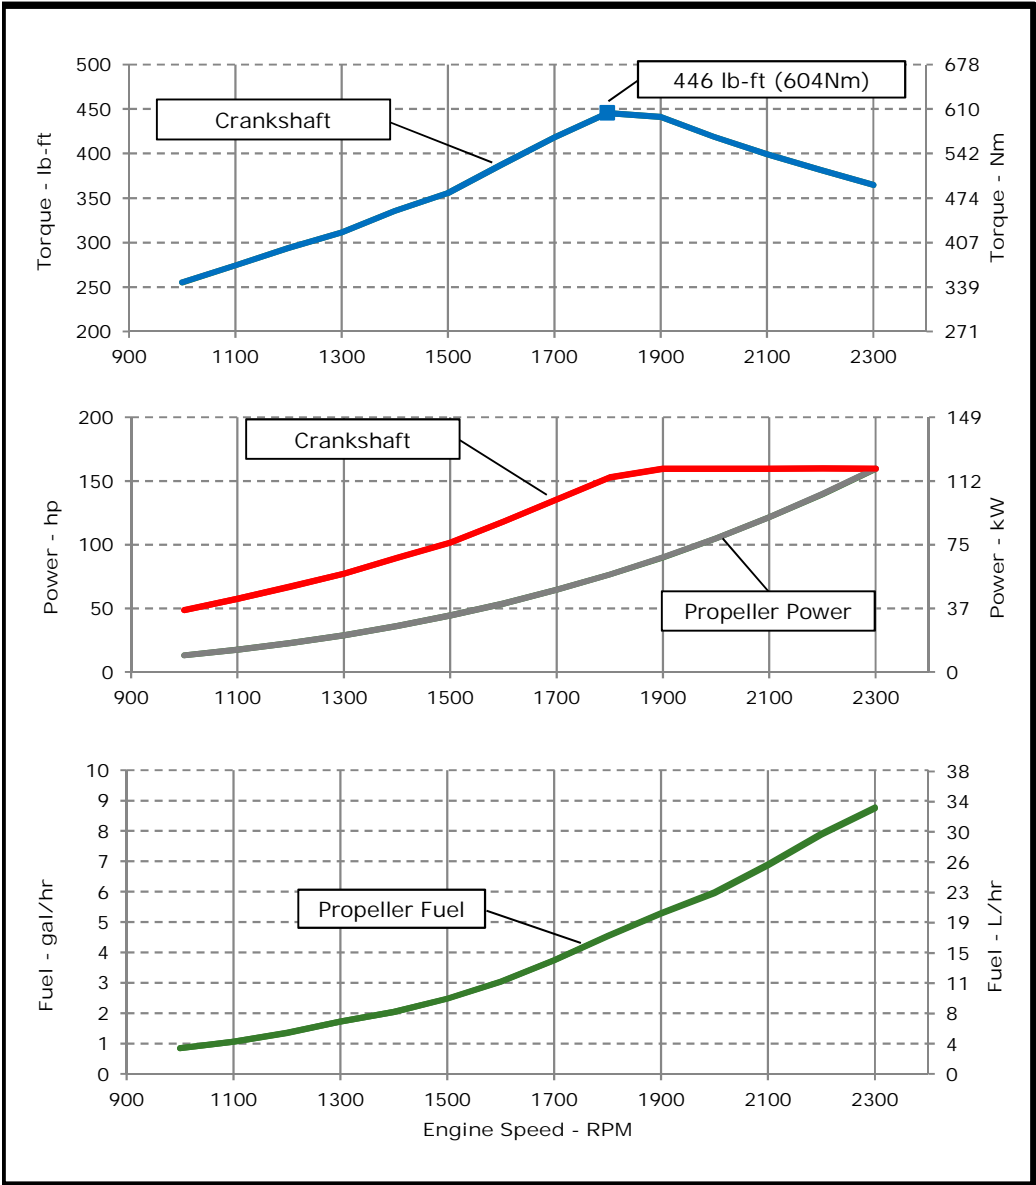

REFERENCE CONDITIONS

Air Intake Restriction.....12 in.H₂O (3 kPa)
 Exhaust Back Pressure..... 30 in.H₂O (7.5 kPa)

Rated speed and power
 Gross power guaranteed within ±5% at ISO 8665/SAE J1228 and ISO 3046/SAE J1995
 Test conditions:

77 °F (25 °C) air inlet temperature
 29.31 in.Hg (99 kPa) barometric pressure
 104 °F (40 °C) fuel inlet temperature
 0.853 fuel specific gravity @ 60 °F (15.5 °C)

Ambient air temperature is defined to be the temperature of ambient air close to operating vessel that is not influenced in any manner by operating characteristics of the vessel (free field temp).

Conversion factors: Power: kW = hp x 0.746
 Fuel: 1 gal = 7.1 lb, 1 L = 0.85 kg
 Torque: N-m = lb-ft x 1.356

All values from currently available data. Subject to manufacturing and measurement variations and to change without notice.
 Actual performance is subject to application and operation conditions outside of John Deere control.

All pressures shown in gauge pressure

Notes:

M1: The M1 rating is for marine propulsion applications that may operate up to 24 hours per day at uninterrupted full power and have load factors greater than 65 percent.

Possible applications: Line hauls tugs and towboats, fish and shrimp trawlers/draggers, and displacement hull fishing boats.

Designed/Calibrated to meet: <ul style="list-style-type: none"> • EPA Marine Tier 3 Commercial (40 CFR 1042) • IMO Tier II Compliant (MARPOL Annex VI) • EU Stage IIIa Inland Waterways (NRMM 97/68/EC, as amended) • Recreational Craft Directive 2 (2013/53/EU) Ref: Engine Emission Label	Certified by: <div style="text-align: right;">29-Oct-18</div>
Performance Curve: 4045AFM85_A	

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

Engine Installation Criteria

General Data

Model	4045AFM85			
Number of Cylinders	4			
Bore	107	mm	4.21	in
Stroke	127	mm	5.00	in
Displacement	4.5	L	275	in ³
Compression Ratio	16.7:1			
Valves per Cylinder, Intake/Exhaust	2/2			
Combustion System	Direct injection			
Firing Order	1-3-4-2			
Engine Type	In line, 4 Cycle			
Aspiration	Turbocharged and Aftercooled			
Aftercooling System	Engine coolant			
Engine Crankcase Vent System	Closed			

Cooling System*

Engine Coolant Heat Rejection**	129	kW	7343	BTU/min
Max. Pressure Drop Across Keel Cooler	40	kPa	5.8	psi
Coolant Flow	198	L/min	52	gal/min
Min. Coolant Pump Inlet Pressure	30.3	kPa	4.4	psi
Thermostat Start to Open	71	°C	160	°F
Thermostat Fully Open	83	°C	182	°F
Engine Coolant Capacity, HE	17	L	4.4	gal
Engine Coolant Capacity, KC	20	L	5.2	gal
Min. Coolant Fill Rate	12	L/min	3.2	gal/min
Min. Pressure Cap	110.3	kPa	16	psi
Max. External Coolant Restriction	40	kPa	5.8	psi
Normal Operation Max Top Tank Temperature	100	°C	212	°F
≤ 5% of Total Operating Time Top Tank Temperature	100-110	°C	212-230	°F
Absolute Max Top Tank Temperature	110	°C	230	°F
Recommended Fuel Cooler	2	kW	139	BTU/min
Engine Radiated Heat	17	kW	949	BTU/min

* The cooling system should be capable of typical at ambient up to the maximum conditions in which the vessel will operate.

Typical operation is defined as the average load sustainable in the vessel over 10 min.

** Reference 32 °C Sea Water Temperature

Physical Data

Length to rear face of block	752	mm	29.6	in
Length to rear face of flywheel housing (SAE #3)	890	mm	35.0	in
Length maximum	1105	mm	43.5	in
Width maximum	864	mm	34.0	in
Height, crank centerline to top	654	mm	25.7	in
Height, crank centerline to bottom	310	mm	12.2	in
Weight, with oil, no coolant (includes engine, flywheel housing, flywheel, and electronics)	578	kg	1274	lb
Center of Gravity Location, X-axis From Rear Face of Block	273	mm	10.8	in
Center of Gravity Location, Y-axis Right of Crankshaft	4.78	mm	0.2	in
Center of Gravity Location, Z-axis Above Crankshaft	227	mm	8.9	in
Max. Allowable Static Bending Moment At Rear Face of Flywheel Housing (for installations up to 5-G)	814	Nm	600	lb-ft
Thrust Bearing Load Limit, Forward Continuous	2.2	kN	495	lbf
Thrust Bearing Load Limit, Forward Intermittent	4	kN	899	lbf
Thrust Bearing Load Limit, Rearward Continuous	1	kN	225	lbf
Thrust Bearing Load Limit, Rearward Intermittent	2	kN	450	lbf

Electrical System

Min. Recommended Battery Capacity, 12V @32 °F (0 °C)	625	amps		
Min. Recommended Battery Capacity, 24V @32 °F (0 °C)	500	amps		
Starter Rolling Current, 12V @32 °F (0 °C)	920	amps		
Starter Rolling Current, 24V @32 °F (0 °C)	600	amps		
Min. Voltage at ECU during Cranking, 12V	6	volts		
Min. Voltage at ECU during Cranking, 24V	10	volts		
Max. Allowable Start Circuit Resistance, 12V	0.002	ohms		
Max. Allowable Start Circuit Resistance, 24V	0.0012	ohms		
Electrical Component Maximum Temperature Limit	125	°C	257	°F
Maximum ECU Temperature	105	°C	221	°F

Performance Curve: 4045AFM85_A

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

Engine Installation Criteria

Fuel System

ECU Description	L14		
Fuel Injection Pump	HPCR		
Governor Type	Electronic		
Volumetric Fuel Consumption	33.2	L/hr	8.8 gal/hr
Mass Fuel Consumption	28.2	kg/hr	62 lb/hr
Total Fuel Volumetric Flow	152	L/hr	40.0 gal/hr
Total Fuel Mass Flow	129	kg/hr	284 lb/hr
Max. Fuel Inlet Restriction*	20	kPa	80 in.H2O
Max. Fuel Inlet Pressure	20	kPa	80 in.H2O
Max Fuel Return Pressure	20	kPa	80 in.H2O
Normal Operation Fuel Temperature	40	°C	104 °F
Max. Fuel Inlet Temperature	100	°C	212 °F
Min. Recommended Fuel Line Inside Diameter	6.63	mm	0.26 in
Min. Recommended Fuel Line Size	5 (-) AN		
Primary Fuel Filter	10 mic		
Secondary Fuel Filter	2 mic		

Lubrication System

Oil Pressure at Rated Speed	436	kPa	63 psi
Oil Pressure at Low Idle (800rpm)**	213	kPa	31 psi
Max. Crankcase Pressure	2	kPa	8 in.H2O
Maximum Installed Angle, Front Down	0 deg		
Maximum Installed Angle, Front Up	12 deg		
Engine Angularity Limits Any Direction, Continuous***	35 deg		
Engine Angularity Limits Any Direction, Intermittent***	45 deg		

Seawater Pump System

Seawater Pump Flow	231	L/min	61 gal/min
Max. Suction Lift	3	m	9.8 ft
Max. Outlet Pressure	140	kPa	20 psi
Max. Inlet Restriction	30	kPa	4 psi

* With clean filters

** With John Deere Plus-50 II™ 15w-40, not applicable with break in oil.

*** With 19CZ option

Air Intake System

Engine Air Flow	9.39	m ³ /min	331.6	ft ³ /min
Intake Manifold Pressure	135.4	kPa	19.6	psi
Manifold Air Temperature	81	°C	178	°F
Maximum Manifold Air Temperature	130	°C	266	°F
Max. Allowable Temperature Rise, Ambient	17	°C	30	°F
Air to Engine Inlet				
Max. Air Intake Restriction, Clean Air Cleaner	3	kPa	12	in.H ₂ O
Max. Air Intake Restriction, Dirty Air Cleaner	6.25	kPa	25	in.H ₂ O
Min. Ventilation Area	0.058	m ²	90	in ²

Performance Data

Rated Power	119	kW	160	hp
Rated Speed	2300 RPM			
Peak Torque Speed	1800 RPM			
Low Idle Speed	600 RPM			
Rated Torque	494	Nm	364	ft-lb
Peak Torque	567	Nm	418	ft-lb
BMEP, Rated	1386	kPa	201	psi
Rated Pferdestärke (metric hp)	162 ps			
Front Drive Capacity, Intermittent	621	Nm	458	lb-ft
Front Drive Capacity, Continuous	621	Nm	458	lb-ft

Exhaust System

Exhaust Flow	22.4	m ³ /min	791	ft ³ /min
Exhaust Flow @ gas STP	10.1	m ³ /min	357	ft ³ /min
Exhaust Temperature	441	°C	826	°F
Max. Allowable Exhaust Restriction	7.5	kPa	30	in.H ₂ O
Max. Shear on Turbocharger Exhaust Outlet	11	kg	24.3	lb
Max. Bending Moment on Turbocharger Exhaust Outlet	7	Nm	15.4	lb-ft
Min. Exhaust Pipe Diameter, Dry	101.6	mm	4.0	in
Min. Exhaust Pipe Diameter, Wet	114.3	mm	4.5	in

Performance Curve: 4045AFM85_A

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

Engine Installation Criteria

Engine Performance Data Table

Engine Speed	Crank Power		Crank Torque		* Prop Power		* Prop Fuel		* Prop BSFC
	RPM	kW	hp	Nm	lb-ft	kW	hp	L/hr	gal/hr
2300	119	160	494	364	119	160	33.2	8.8	237
2200	119	160	517	381	104	140	29.9	7.9	244
2100	119	160	541	399	91	121	26.1	6.9	245
2000	119	160	568	419	78	105	22.6	6.0	246
1900	119	160	598	441	67	90	20.0	5.3	254
1800	114	153	604	446	57	76	17.2	4.5	256
1700	101	135	567	418	48	64	14.2	3.7	251
1600	88	118	525	387	40	54	11.5	3.0	244
1500	76	102	482	355	33	44	9.4	2.5	242
1400	67	89	455	336	27	36	7.7	2.0	245
1300	57	77	422	311	21	29	6.5	1.7	259
1200	50	67	398	294	17	23	5.1	1.4	258
1100	43	57	372	274	13	17	4.0	1.1	263
1000	36	49	346	255	10	13	3.2	0.8	279

* Theoretical 3.0 exponent propeller curve , measured at flywheel

Performance Curve: 4045AFM85_A

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.