






JOHN DEERE

ENGINE PERFORMANCE CURVE

Rating: M2 - 125hp (93kW) @ 2500 RPM
 Application: Marine

PowerTech™ 4.5L Engine

Model: 4045TFM85

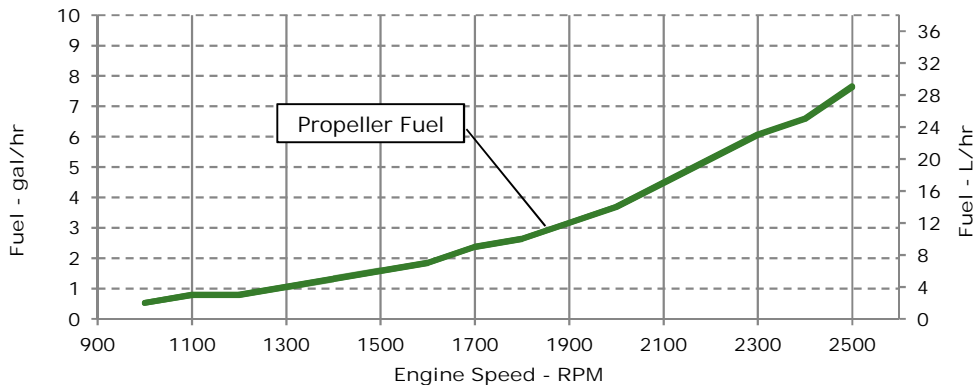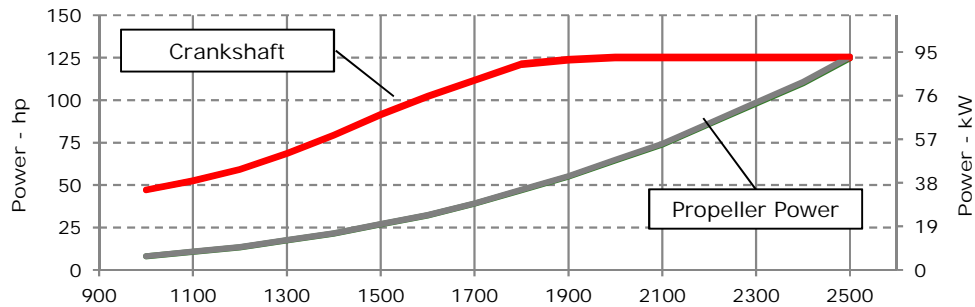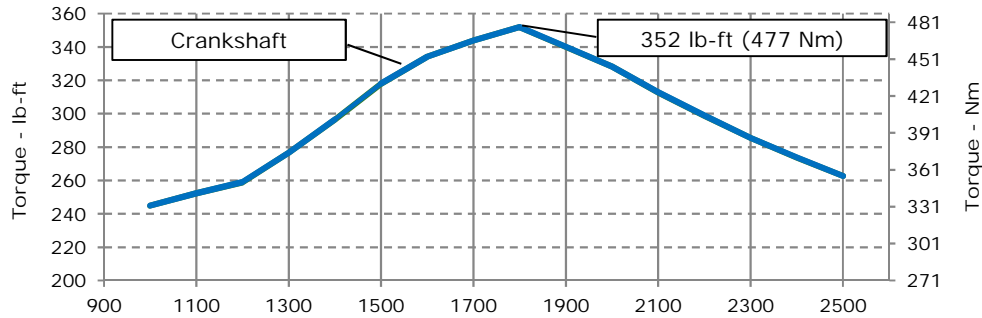

REFERENCE CONDITIONS

Air Intake Restriction.....12 in.H₂O (3 kPa)
 Exhaust Back Pressure..... 30 in.H₂O (7.5 kPa)

Rated speed and power
 Gross power guaranteed within ±5% at ISO 8665/SAE J1228 and ISO 3046/SAE J1995
 Test conditions:
 77 °F (25 °C) air inlet temperature
 29.31 in.Hg (99 kPa) barometric pressure
 104 °F (40 °C) fuel inlet temperature
 0.853 fuel specific gravity @ 60 °F (15.5 °C)

Ambient air temperature is defined to be the temperature of ambient air close to operating vessel that is not influenced in any manner by operating characteristics of the vessel (free field temp).

Conversion factors: Power: kW = hp x 0.746
 Fuel: 1 gal = 7.1 lb, 1 L = 0.85 kg
 Torque: N·m = lb-ft x 1.356

All values from currently available data. Subject to manufacturing and measurement variations and to change without notice.
 Actual performance is subject to application and operation conditions outside of John Deere control.

All pressures shown in gauge pressure

Notes:

M2: The M2 rating is for marine propulsion applications that operate between 3,000-5,000 hours per year and have load factors up to 65 percent. This rating is for applications that are in continuous use and use full power for no more than 16 hours of each 24 hours of operation. The remaining time of operation is at or below cruising speed.

Possible Applications: Short-range tugs and towboats (pool boats), long-range

Designed/Calibrated to meet:

- EPA Marine Tier 3 Commercial (40 CFR 1042)
- IMO Exempt (<130 kW)
- EU Stage IIIa Inland Waterways (NRMM 97/68/EC, as amended)
- Recreational Craft Directive 2 (2013/53/EU)

Ref: Engine Emission Label

Certified by:

29-Oct-18

Performance Curve: 4045TFM85_D

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

Engine Installation Criteria

General Data

Model	4045TFM85			
Number of Cylinders	4			
Bore	106	mm	4.17	in
Stroke	127	mm	5.00	in
Displacement	4.5	L	275	in ³
Compression Ratio	19.0:1			
Valves per Cylinder, Intake/Exhaust	1/1			
Combustion System	Direct injection			
Firing Order	1-3-4-2			
Engine Type	In line, 4 Cycle			
Aspiration	Turbocharged			
Aftercooling System	None			
Engine Crankcase Vent System	None, Offered as Accessory			

Cooling System*

Total Engine to Seawater Heat Rejection**	102	kW	5806	BTU/min
Coolant Flow	170	L/min	45	gal/min
Min. Coolant Pump Inlet Pressure	30.3	kPa	4.4	psi
Thermostat Start to Open	82	°C	180	°F
Thermostat Fully Open	94	°C	202	°F
Engine Coolant Capacity, HE	14	L	3.7	gal
Engine Coolant Capacity, KC	17	L	4.5	gal
Min. Coolant Fill Rate	12	L/min	3.2	gal/min
Min. Pressure Cap	69	kPa	10	psi
Max. External Coolant Restriction	40	kPa	5.8	psi
Normal Operation Max Top Tank Temperature	100	°C	212	°F
≤ 5% of Total Operating Time Top Tank Temperature	100-110	°C	212-230	°F
Absolute Max Top Tank Temperature	110	°C	230	°F
Recommended Fuel Cooler	3	kW	171	BTU/min
Engine Radiated Heat	15	kW	854	BTU/min

* The cooling system should be capable of typical at ambient up to the maximum conditions in which the vessel will operate.

Typical operation is defined as the average load sustainable in the vessel over 10 min.

** Reference 32 °C Sea Water Temperature

Physical Data

Length to rear face of block	739	mm	29.1	in
Length to rear face of flywheel housing (SAE #3)	877	mm	34.5	in
Length maximum	1020	mm	40.2	in
Width maximum	808	mm	31.8	in
Height, crank centerline to top	625	mm	24.6	in
Height, crank centerline to bottom	287	mm	11.3	in
Weight, with oil, no coolant (includes engine, flywheel housing, flywheel, and electronics)	507	kg	1117	lb
Center of Gravity Location, X-axis From Rear Face of Block	250	mm	9.8	in
Center of Gravity Location, Y-axis Right of Crankshaft	-3.7	mm	-0.1	in
Center of Gravity Location, Z-axis Above Crankshaft	200	mm	7.9	in
Max. Allowable Static Bending Moment At Rear Face of Flywheel Housing (for installations up to 5-G)	814	Nm	600	lb-ft
Thrust Bearing Load Limit, Forward Continuous	2.2	kN	495	lbf
Thrust Bearing Load Limit, Forward Intermittent	4	kN	899	lbf
Thrust Bearing Load Limit, Rearward Continuous	1	kN	225	lbf
Thrust Bearing Load Limit, Rearward Intermittent	2	kN	450	lbf

Electrical System

Min. Recommended Battery Capacity, 12V @32 °F (0 °C)	625	amps		
Min. Recommended Battery Capacity, 24V @32 °F (0 °C)	500	amps		
Starter Rolling Current, 12V @32 °F (0 °C)	920	amps		
Starter Rolling Current, 24V @32 °F (0 °C)	600	amps		
Min. Voltage at ECU during Cranking, 12V	6	volts		
Min. Voltage at ECU during Cranking, 24V	10	volts		
Max. Allowable Start Circuit Resistance, 12V	0.002	ohms		
Max. Allowable Start Circuit Resistance, 24V	0.0012	ohms		
Electrical Component Maximum Temperature Limit	125	°C	257	°F
Maximum ECU Temperature	105	°C	221	°F

Performance Curve: 4045TFM85_D

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

Engine Installation Criteria

Fuel System

ECU Description	L16		
Fuel Injection Pump	HPCR		
Governor Type	Electronic		
Volumetric Fuel Consumption	29 L/hr	7.7 gal/hr	
Mass Fuel Consumption	24.7 kg/hr	54 lb/hr	
Total Fuel Volumetric Flow	79 L/hr	20.9 gal/hr	
Total Fuel Mass Flow	67.2 kg/hr	148 lb/hr	
Max. Fuel Inlet Restriction*	20 kPa	80 in.H2O	
Max. Fuel Inlet Pressure	20 kPa	80 in.H2O	
Max Fuel Return Pressure	20 kPa	80 in.H2O	
Normal Operation Fuel Temperature	40 °C	104 °F	
Max. Fuel Inlet Temperature	100 °C	212 °F	
Min. Recommended Fuel Line Inside Diameter	4.78 mm	0.19 in	
Min. Recommended Fuel Line Size	4 (-) AN		
Primary Fuel Filter	10 mic		
Secondary Fuel Filter	2 mic		

Lubrication System

Oil Pressure at Rated Speed	330 kPa	48 psi	
Oil Pressure at Low Idle (800rpm)**	200 kPa	29 psi	
Max. Crankcase Pressure	2 kPa	8 in.H2O	
Maximum Installed Angle, Front Down	0 deg		
Maximum Installed Angle, Front Up	12 deg		
Engine Angularity Limits Any Direction, Continuous***	30 deg		
Engine Angularity Limits Any Direction, Intermittent***	45 deg		

Seawater Pump System

Seawater Pump Flow	133 L/min	35 gal/min	
Max. Suction Lift	3 m	9.8 ft	
Max. Outlet Pressure	140 kPa	20 psi	
Max. Inlet Restriction	30 kPa	4 psi	

* With clean filters

** With John Deere Plus-50 II™ 15w-40, not applicable with break in oil.

*** With 1932 option

Air Intake System

Engine Air Flow	9.7 m ³ /min	342.6 ft ³ /min	
Intake Manifold Pressure	151 kPa	21.9 psi	
Manifold Air Temperature	160 °C	320 °F	
Maximum Manifold Air Temperature	185 °C	365 °F	
Max. Allowable Temperature Rise, Ambient	17 °C	30 °F	
Air to Engine Inlet			
Max. Air Intake Restriction, Clean Air Cleaner	3 kPa	12 in.H2O	
Max. Air Intake Restriction, Dirty Air Cleaner	6.25 kPa	25 in.H2O	
Min. Ventilation Area	0.06 m ²	92 in ²	

Performance Data

Rated Power	93 kW	125 hp	
Rated Speed	2500 RPM		
Peak Torque Speed	1800 RPM		
Low Idle Speed	600 RPM		
Rated Torque	356 Nm	263 ft-lb	
Peak Torque	477 Nm	352 ft-lb	
BMEP, Rated	994 kPa	144 psi	
Rated Pferdestärke (metric hp)	101 ps		
Front Drive Capacity, Intermittent	542 Nm	400 lb-ft	
Front Drive Capacity, Continuous	542 Nm	400 lb-ft	

Exhaust System

Exhaust Flow	22.5 m ³ /min	795 ft ³ /min	
Exhaust Flow @ gas STP	9.1 m ³ /min	321 ft ³ /min	
Exhaust Temperature	454 °C	849 °F	
Max. Allowable Exhaust Restriction	7.5 kPa	30 in.H2O	
Max. Shear on Turbocharger Exhaust Outlet	11 kg	24.3 lb	
Max. Bending Moment on Turbocharger Exhaust Outlet	7 Nm	15.4 lb-ft	
Min. Exhaust Pipe Diameter, Dry	76.2 mm	3.0 in	
Min. Exhaust Pipe Diameter, Wet	88.9 mm	3.5 in	

Performance Curve: 4045TFM85_D

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

Engine Installation Criteria

Engine Performance Data Table

Engine Speed	Crank Power		Crank Torque		* Prop Power		* Prop Fuel		* Prop BSFC
RPM	kW	hp	Nm	lb-ft	kW	hp	L/hr	gal/hr	g/kW-hr
2500	93	125	356	263	93	125	29	8	262
2400	93	125	371	274	82	110	25	7	257
2300	93	125	387	285	73	98	23	6	269
2200	93	125	405	299	64	86	20	5	265
2100	93	125	424	313	55	74	17	4	260
2000	93	125	445	328	48	64	14	4	257
1900	92	123	461	340	41	55	12	3	252
1800	90	121	477	352	35	47	10	3	251
1700	83	111	466	344	29	39	9	2	250
1600	76	102	453	334	24	32	7	2	253
1500	68	91	431	318	20	27	6	2	256
1400	59	79	402	296	16	21	5	1	263
1300	51	68	375	277	13	17	4	1	272
1200	44	59	351	259	10	13	3	1	284
1100	39	52	342	252	8	11	3	1	298
1000	35	47	332	245	6	8	2	1	314

* Theoretical 3.0 exponent propeller curve , measured at flywheel

Performance Curve: 4045TFM85_D

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.