




ENGINE PERFORMANCE CURVE

Rating: 50 Hz - 173hp (129kW) @ 1500 RPM
 Application: Marine

PowerTech™ 6.8L Engine
 Model: 6068AFM85

Generator Efficiency (%)	Power Factor	Calculated Gen-Set Rating		Prime Power	10% Overload Power
		kW	kVA	hp (kW)	hp (kW)
88-92	0.8	114-119	143-149	173(129)	190(142)

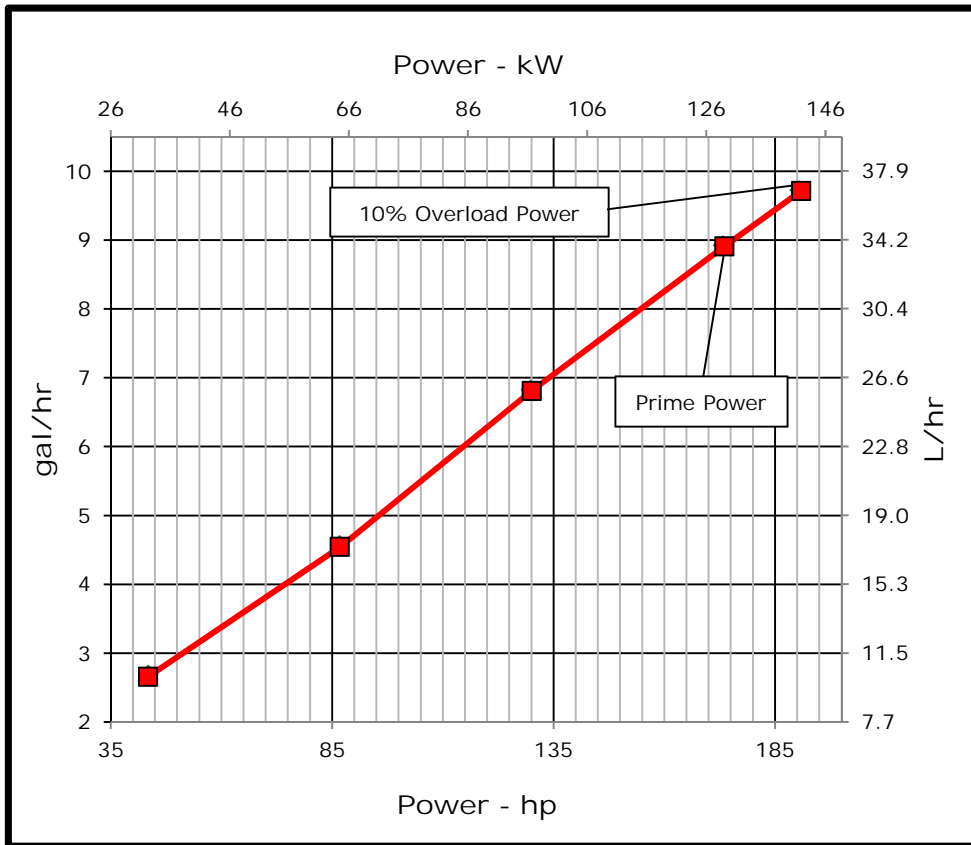

REFERENCE CONDITIONS

Air Intake Restriction.....12 in.H₂O (3 kPa)
 Exhaust Back Pressure..... 30 in.H₂O (7.5 kPa)

Rated speed and power
 Gross power guaranteed within ±5% at ISO 8665/SAE J1228 and ISO 3046/SAE J1995
 Test conditions:

77 °F (25 °C) air inlet temperature
 29.31 in.Hg (99 kPa) barometric pressure
 104 °F (40 °C) fuel inlet temperature
 0.853 fuel specific gravity @ 60 °F (15.5 °C)

Ambient air temperature is defined to be the temperature of ambient air close to operating vessel that is not influenced in any manner by operating characteristics of the vessel (free field temp).

Conversion factors: Power: kW = hp x 0.746
 Fuel: 1 gal = 7.1 lb, 1 L = 0.85 kg
 Torque: N·m = lb·ft x 1.356

All values from currently available data. Subject to manufacturing and measurement variations and to change without notice.
 Actual performance is subject to application and operation conditions outside of John Deere control.

All pressures shown in gauge pressure

Notes:

Marine Generator: The Marine generator engine rating is the power available under normal varying electrical load factors for an unlimited number of hours per year in commercial applications. This rating incorporates a 10% overload capability, and conforms to ISO 8528 prime power. Average load over a 24-hour period shall not exceed 67% of the prime rating, of which no more than 2 hours are between 100% and 110% of the prime rating.

Constant speed engines are not certified for constant speed propulsion applications (i.e. variable pitch propeller, hybrid propulsion system).

Possible applications: This rating is used for applications that require constant speed operation in power generation or auxiliary applications such as generators and hydraulic pumps.

Designed/Calibrated to meet:

- IMO MARPOL Annex VI Exempt (<130 kW)

Certified by:

Ref: Engine Emission Label

29-Oct-18

Performance Curve: 6068AFM85_H

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

Engine Installation Criteria

General Data

Model	6068AFM85		
Number of Cylinders	6		
Bore	107 mm	4.21	in
Stroke	127 mm	5.00	in
Displacement	6.8 L	415	in ³
Compression Ratio	16.7:1		
Valves per Cylinder, Intake/Exhaust	2/2		
Combustion System	Direct Injection		
Firing Order	1-5-3-6-2-4		
Engine Type	In line, 4 Cycle		
Aspiration	Turbocharged and Aftercooled		
Aftercooling System	Engine Coolant		
Engine Crankcase Vent System	Closed		

Cooling System*

Engine Coolant Heat Rejection**	140 kW	7980	BTU/min
Max. Pressure Drop Across KC and Piping	40 kPa	6	psi
Coolant Flow	162 L/min	42.9	gal/min
Min. Coolant Pump Inlet Pressure	30.3 kPa	4.4	psi
Thermostat Start to Open	71 °C	160	°F
Thermostat Fully Open	83 °C	182	°F
Engine Coolant Capacity, HE	34 L	9.0	gal
Engine Coolant Capacity, KC	33.5 L	8.8	gal
Min. Coolant Fill Rate	12 L/min	3.2	gal/min
Min. Pressure Cap	110.3 kPa	16	psi
Min. Pump Inlet Pressure	30 kPa	4.4	psi
Max. External Coolant Restriction	40 kPa	5.8	psi
Normal Operation Max Top Tank Temperature	100 °C	212	°F
≤ 5% of Total Operating Time Top Tank Temperature	100-110 °C	212-230	°F
Absolute Max Top Tank Temperature	110 °C	230	°F
Recommended Fuel Cooler	3 kW	151	BTU/min
Engine Radiated Heat	17 kW	966	BTU/min

* The cooling system should be capable of typical at ambient up to the maximum conditions in which the vessel will operate.

Typical operation is defined as the average load sustainable in the vessel over 10 min.

** Reference 32 °C Sea Water Temperature

Physical Data

Length to rear face of block	1034 mm	40.7	in
Length maximum	1374 mm	54.1	in
Width maximum	862 mm	33.9	in
Height, crank centerline to top	644 mm	25.4	in
Height, crank centerline to bottom	291 mm	11.5	in
Weight, with oil, no coolant (includes engine, flywheel housing, flywheel, and electronics)	787 kg	1735	lb
Center of Gravity Location, X-axis From Rear Face of Block	390 mm	15.4	in
Center of Gravity Location, Y-axis Right of Crankshaft	-14 mm	-0.6	in
Center of Gravity Location, Z-axis Above Crankshaft	186 mm	7.32	in
Max. Allowable Static Bending Moment At Rear Face of Flywheel Housing (for installations up to 5-G)	814 Nm	600	lb-ft
Thrust Bearing Load Limit, Forward Continuous	2.2 kN	495	lbf
Thrust Bearing Load Limit, Forward Intermittent	4 kN	899	lbf
Thrust Bearing Load Limit, Rearward Continuous	1 kN	225	lbf
Thrust Bearing Load Limit, Rearward Intermittent	2 kN	450	lbf

Electrical System

Min. Recommended Battery Capacity, 12V @32 °F (0 °C)	925	amps
Min. Recommended Battery Capacity, 24V @32 °F (0 °C)	625	amps
Starter Rolling Current, 12V @32 °F (0 °C)	920	amps
Starter Rolling Current, 24V @32 °F (0 °C)	600	amps
Min. Voltage at ECU during Cranking, 12V	6	volts
Min. Voltage at ECU during Cranking, 24V	10	volts
Max. Allowable Start Circuit Resistance, 12V	0	ohms
Max. Allowable Start Circuit Resistance, 24V	0	ohms
Electrical Component Maximum Temperature Limit	125 °C	257 °F
Maximum ECU Temperature	105 °C	221 °F

Performance Curve: 6068AFM85_H

All values at rated speed and power at standard conditions per SAE J1995 unless otherwise noted.

Engine Installation Criteria

Fuel System

ECU Description	L14	
Fuel Injection Pump	HPCR	
Governor Type	Electronic	
Volumetric Fuel Consumption, Prime	33.8 L/hr	8.9 gal/hr
Mass Fuel Consumption, Prime	28.7 kg/hr	63 lb/hr
Total Fuel Volumetric Flow	162 L/hr	42.8 gal/hr
Total Fuel Mass Flow	138 kg/hr	304 lb/hr
Max. Fuel Inlet Restriction*	20 kPa	80 in.H ₂ O
Max. Fuel Inlet Pressure	20 kPa	80 in.H ₂ O
Max Fuel Return Pressure	20 kPa	80 in.H ₂ O
Normal Operation Fuel Temperature	40 °C	104 °F
Max. Fuel Inlet Temperature	100 °C	212 °F
Min. Recommended Fuel Line Inside Diameter	6.85 mm	0.27 in
Min. Recommended Fuel Line Size	5 (-) AN	
Primary Fuel Filter	10 mic	
Secondary Fuel Filter	2 mic	

Lubrication System

Oil Pressure at 1500 RPM**	324 kPa	47 psi
Max. Crankcase Pressure	2 kPa	8 in.H ₂ O
Maximum Installed Angle, Front Down	0 deg	
Maximum Installed Angle, Front Up	12 deg	
Engine Angularity Limits Any Direction, Continuous***	25 deg	
Engine Angularity Limits Any Direction, Intermittent***	35 deg	

Seawater Pump System

Seawater Pump Flow	162 L/min	43 gal/min
Max. Suction Lift	3 m	9.8 ft
Max. Outlet Pressure	140 kPa	20 psi
Max. Inlet Restriction	30 kPa	4 psi

* With clean filters

** With John Deere Plus-50 II™ 15w-40, not applicable with break in oil.

*** With 19BP option

Air Intake System

Engine Air Flow	9.2 m ³ /min	325 ft ³ /min
Intake Manifold Pressure	121 kPa	17.6 psi
Manifold Air Temperature	74 °C	165 °F
Maximum Manifold Air Temperature	130 °C	266 °F
Max. Allowable Temperature Rise, Ambient Air to Engine Inlet	17 °C	30 °F
Max. Air Intake Restriction, Clean Air Cleaner	3 kPa	12 in.H ₂ O
Max. Air Intake Restriction, Dirty Air Cleaner	6.25 kPa	25 in.H ₂ O
Min. Ventilation Area	0.0567 m ²	88 in ²

Performance Data

Prime Power	129 kW	173 hp
10% Overload Power	142 kW	190 hp
Rated Speed	1500 RPM	
Low Idle Speed	1000 RPM	
Prime Torque	822 Nm	606 lb-ft
BMEP, Prime	1519 kPa	220 psi
Rated Pferdestärke, Prime (metric hp)	176 ps	
Front Drive Capacity, Intermittent	907 Nm	669 lb-ft
Front Drive Capacity, Continuous	907 Nm	669 lb-ft
Friction Power @ Rated Speed	12.8 kW	17.2 hp

Exhaust System

Exhaust Flow	21.1 m ³ /min	747 ft ³ /min
Exhaust Flow @ gas STP	9.6 m ³ /min	337 ft ³ /min
Exhaust Temperature	439 °C	822 °F
Max. Allowable Exhaust Restriction ⁺	7.5 kPa	30 in.H ₂ O
Max. Shear on Turbocharger Exhaust Outlet	11 kg	24.3 lb
Max. Bending Moment on Turbocharger Exhaust Outlet	7 Nm	15.4 lb-ft
Min. Exhaust Pipe Diameter, Dry	101.6 mm	4.0 in
Min. Exhaust Pipe Diameter, Wet	127.0 mm	5.0 in

⁺ Exhaust system restriction should be limited to 7.5 kPa. When an exhaust aftertreatment system is installed, the maximum design restriction is 15 kPa. Restriction over 7.5 kPa will result in diminished performance. Restriction over 15 kPa may cause engine damage

Performance Curve: 6068AFM85_H

All values at rated speed and power at standard conditions per SAE J1995 unless otherwise noted.

Engine Installation Criteria

Engine Performance Data Table

Engine Power	Crank Power		Crank Torque		Fuel Consumption		BSFC
	kW	hp	Nm	lb-ft	L/hr	gal/hr	g/kW-hr
25%	32	43	206	152	10.2	2.7	268
50%	65	87	411	303	17.3	4.6	228
75%	97	130	616	454	25.9	6.8	227
100%	129	173	822	606	33.8	8.9	222
110%	142	190	904	667	36.8	9.7	220

Performance Curve: 6068AFM85_H

All values at rated speed and power at standard conditions per SAE J1995 unless otherwise noted.