




JOHN DEERE

ENGINE PERFORMANCE CURVE

Rating: M3 - 575hp (429kW) @ 2000 RPM
 Application: Marine

PowerTech™ 13.5L Engine

Model: 6135SFM85

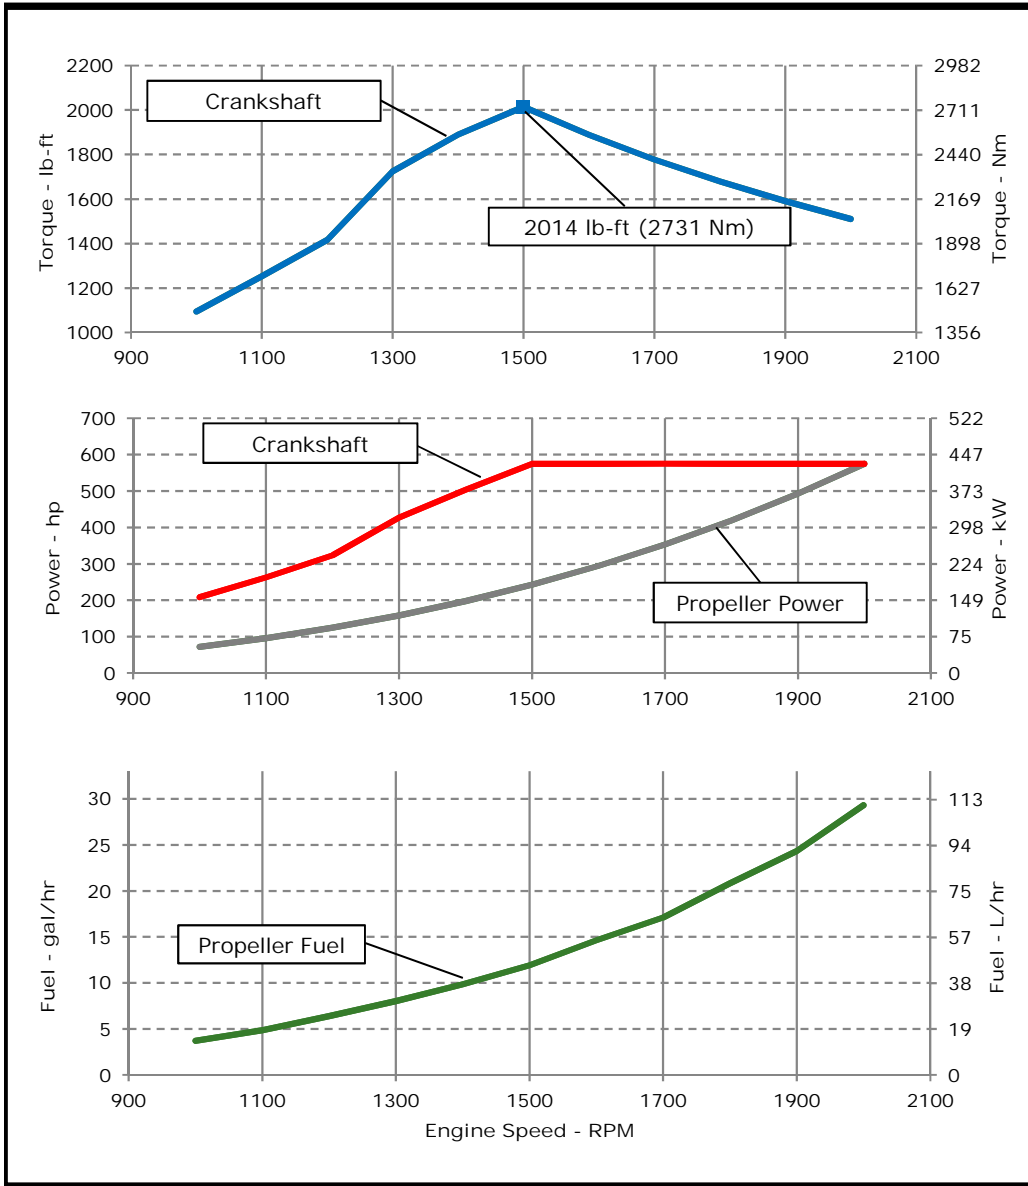

REFERENCE CONDITIONS

Air Intake Restriction..... 12 in.H₂O (3 kPa)
 Exhaust Back Pressure..... 30 in.H₂O (7.5 kPa)

Rated speed and power
 Gross power guaranteed within ±5% at ISO 8665/SAE J1228 and ISO 3046/SAE J1995
 Test conditions:

77 °F (25 °C) air inlet temperature
 29.31 in.Hg (99 kPa) barometric pressure
 104 °F (40 °C) fuel inlet temperature
 0.853 fuel specific gravity @ 60 °F (15.5 °C)

Ambient air temperature is defined to be the temperature of ambient air close to operating vessel that is not influenced in any manner by operating characteristics of the vessel (free field temp).

Conversion factors:
 Power: kW = hp x 0.746
 Fuel: 1 gal = 7.1 lb, 1 L = 0.85 kg
 Torque: N·m = lb-ft x 1.356

All values from currently available data. Subject to manufacturing and measurement variations and to change without notice.
 Actual performance is subject to application and operation conditions outside of John Deere control.

All pressures shown in gauge pressure

Notes:

M3: The M3 rating is for marine propulsion applications that typically operate between 2,000-4,000 hours per year and have load factors up to 50 percent. This rating is for applications that use full power for no more than 4 hours out of each 12 hours of operation. The remaining time of operation is at or below cruising speed.

Possible applications: Coastal fishing boats offshore crew boats, research boats. Short range ferryboats and dinner cruise boats.

Designed/Calibrated to meet:	Certified by:
<ul style="list-style-type: none"> EPA Marine Tier 3 Commercial (40 CFR 1042) IMO Tier II Compliant (MARPOL Annex VI) EU Stage IIIa Inland Waterways (NRMM 97/68/EC, as amended) Recreational Craft Directive 2 (2013/53/EU) 	 12-Mar-18
Ref: Engine Emission Label	

Performance Curve: 6135SFM85_C

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

Engine Installation Criteria

General Data

Model	6135SFM85			
Number of Cylinders	6			
Bore	132	mm	5.20	in
Stroke	165	mm	6.50	in
Displacement	13.5	L	824	in ³
Compression Ratio	16.0:1			
Valves per Cylinder, Intake/Exhaust	2/2			
Combustion System	Direct injection			
Firing Order	1-5-3-6-2-4			
Engine Type	In line, 4 Cycle			
Aspiration	Turbocharged and Aftercooled			
Aftercooling System	Seawater cooled			
Engine Crankcase Vent System	Closed			

Cooling System*

Jacket Water Heat Rejection**	271.1	kW	15431	BTU/min
Aftercooler Heat Rejection	125.95	kW	7169	BTU/min
Coolant Flow	264	L/min	70	gal/min
Min. Coolant Pump Inlet Pressure	30.3	kPa	4.4	psi
Thermostat Start to Open	82	°C	180	°F
Thermostat Fully Open	92	°C	197	°F
Engine Coolant Capacity, HE	38	L	10	gal
Min. Coolant Fill Rate	12	L/min	3.2	gal/min
Min. Pressure Cap	110.3	kPa	16	psi
Max. External Coolant Restriction	40	kPa	5.8	psi
Normal Operation Max Top Tank Temperature	100	°C	212	°F
≤ 5% of Total Operating Time Top Tank Temperature	100-105	°C	212-230	°F
Absolute Max Top Tank Temperature	105	°C	221	°F
Return Fuel Heat Rejection	2	kW	89	BTU/min
Engine Radiated Heat	56	kW	3170	BTU/min

* The cooling system should be capable of typical at ambient up to the maximum conditions in which the vessel will operate.

Typical operation is defined as the average load sustainable in the vessel over 10 min.

** Reference 32 °C Sea Water Temperature

Physical Data

Length to rear face of block	1335	mm	52.6	in
Length to rear face of flywheel housing (SAE #1)	1444	mm	56.8	in
Length maximum	1818	mm	71.6	in
Width maximum	1063	mm	41.9	in
Height, crank centerline to top	812	mm	32.0	in
Height, crank centerline to bottom	364	mm	14.3	in
Weight, with oil, no coolant (includes engine, flywheel housing, flywheel, and electronics)	1426	kg	3143	lb
Center of Gravity Location, X-axis From Rear Face of Block	476	mm	18.7	in
Center of Gravity Location, Y-axis Right of Crankshaft	-9	mm	-0.4	in
Center of Gravity Location, Z-axis Above Crankshaft	250	mm	9.8	in
Max. Allowable Static Bending Moment At Rear Face of Flywheel Housing (for installations up to 5-G)	814	Nm	600	lb-ft
Thrust Bearing Load Limit, Forward Continuous	5.4	kN	1214	lbf
Thrust Bearing Load Limit, Forward Intermittent	8.1	kN	1821	lbf
Thrust Bearing Load Limit, Rearward Continuous	2.5	kN	562	lbf
Thrust Bearing Load Limit, Rearward Intermittent	4	kN	899	lbf

Electrical System

Min. Recommended Battery Capacity, 12V @32 °F (0 °C)	1900	amps		
Min. Recommended Battery Capacity, 24V @32 °F (0 °C)	925	amps		
Starter Rolling Current, 12V @32 °F (0 °C)	920	amps		
Starter Rolling Current, 24V @32 °F (0 °C)	600	amps		
Min. Voltage at ECU during Cranking, 12V	6	volts		
Min. Voltage at ECU during Cranking, 24V	10	volts		
Max. Allowable Start Circuit Resistance, 12V	0.002	ohms		
Max. Allowable Start Circuit Resistance, 24V	0.0012	ohms		
Electrical Component Maximum Temperature Limit	125	°C	257	°F
Maximum ECU Temperature	105	°C	221	°F

Performance Curve: 6135SFM85_C

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

Engine Installation Criteria

Fuel System

ECU Description	L15			
Fuel Injection Pump	EUI			
Governor Type	Electronic			
Volumetric Fuel Consumption	111	L/hr	29.3	gal/hr
Mass Fuel Consumption	94.3	kg/hr	208	lb/hr
Total Fuel Volumetric Flow	187	L/hr	49.4	gal/hr
Total Fuel Mass Flow	159	kg/hr	351	lb/hr
Max. Fuel Inlet Restriction*	30	kPa	120	in.H2O
Max. Fuel Inlet Pressure	24	kPa	96	in.H2O
Max Fuel Return Pressure	35	kPa	141	in.H2O
Normal Operation Fuel Temperature	40	°C	104	°F
Max. Fuel Inlet Temperature	100	°C	212	°F
Min. Recommended Fuel Line Inside Diameter	6.79	mm	0.27	in
Min. Recommended Fuel Line Size	5 (-) AN			
Primary Fuel Filter	10 mic			
Secondary Fuel Filter	2 mic			

Lubrication System

Oil Pressure at Rated Speed	280	kPa	41	psi
Oil Pressure at Low Idle (600rpm)**	120	kPa	17	psi
Max. Crankcase Pressure	2	kPa	8	in.H2O
Maximum Installed Angle, Front Down	0 deg			
Maximum Installed Angle, Front Up	12 deg			
Engine Angularity Limits Any Direction, Continuous***	20 deg			
Engine Angularity Limits Any Direction, Intermittent***	30 deg			

Seawater Pump System

Seawater Pump Flow	383	L/min	101	gal/min
Max. Suction Lift	3	m	9.8	ft
Max. Outlet Pressure	140	kPa	20	psi
Max. Inlet Restriction	30	kPa	4	psi

* With clean filters

** With John Deere Plus-50 II™ 15w-40, not applicable with break in oil.

*** With 1904 option

Air Intake System

Engine Air Flow	38	m ³ /min	1342	ft ³ /min
Intake Manifold Pressure	235	kPa	34.1	psi
Manifold Air Temperature	58	°C	136	°F
Maximum Manifold Air Temperature	87	°C	189	°F
Max. Allowable Temperature Rise, Ambient	17	°C	30	°F
Air to Engine Inlet				
Max. Air Intake Restriction, Clean Air Cleaner	3	kPa	12	in.H2O
Max. Air Intake Restriction, Dirty Air Cleaner	6.25	kPa	25	in.H2O
Min. Ventilation Area	0.234	m ²	362	in ²

Performance Data

Rated Power	429	kW	575	hp
Rated Speed	2000 RPM			
Peak Torque Speed	1500 RPM			
Low Idle Speed	600 RPM			
Rated Torque	2048	Nm	1511	ft-lb
Peak Torque	2731	Nm	2014	ft-lb
BMEP, Rated	1907	kPa	276	psi
Rated Pferdestärke (metric hp)	583 ps			
Front Drive Capacity, Intermittent	542	Nm	400	lb-ft
Front Drive Capacity, Continuous	542	Nm	400	lb-ft

Exhaust System

Exhaust Flow	82.66	m ³ /min	2919	ft ³ /min
Exhaust Flow @ gas STP	37	m ³ /min	1307	ft ³ /min
Exhaust Temperature	388	°C	730	°F
Max. Allowable Exhaust Restriction	7.5	kPa	30	in.H2O
Max. Shear on Turbocharger Exhaust Outlet	11	kg	24.3	lb
Max. Bending Moment on Turbocharger Exhaust Outlet	7	Nm	15.4	lb-ft
Min. Exhaust Pipe Diameter, Dry	139.7	mm	5.5	in
Min. Exhaust Pipe Diameter, Wet	152.4	mm	6.0	in

Performance Curve: 6135SFM85_C

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

Engine Installation Criteria

Engine Performance Data Table

Engine Speed	Crank Power		Crank Torque		* Prop Power		* Prop Fuel		* Prop BSFC
	RPM	kW	hp	Nm	lb-ft	kW	hp	L/hr	gal/hr
2000	429	575	2048	1511	429	575	111	29	220
1900	429	575	2156	1590	368	493	92	24	213
1800	429	575	2276	1679	313	419	79	21	214
1700	429	575	2410	1778	263	353	65	17	209
1600	429	575	2560	1888	220	295	55	15	214
1500	429	575	2731	2014	181	243	45	12	212
1400	376	504	2561	1889	147	197	37	10	215
1300	318	427	2339	1725	118	158	30	8	219
1200	241	324	1920	1416	93	124	24	6	222
1100	196	262	1698	1252	71	96	18	5	218
1000	155	208	1484	1095	54	72	14	4	222

* Theoretical 3.0 exponent propeller curve , measured at flywheel

Performance Curve: 6135SFM85_C

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.