




JOHN DEERE

# ENGINE PERFORMANCE CURVE

Rating: **M2 - 125hp (93kW) @ 2500 RPM**  
Application: **Marine**

**PowerTech™ 4.5L Engine**  
**Model: 4045TFM85**

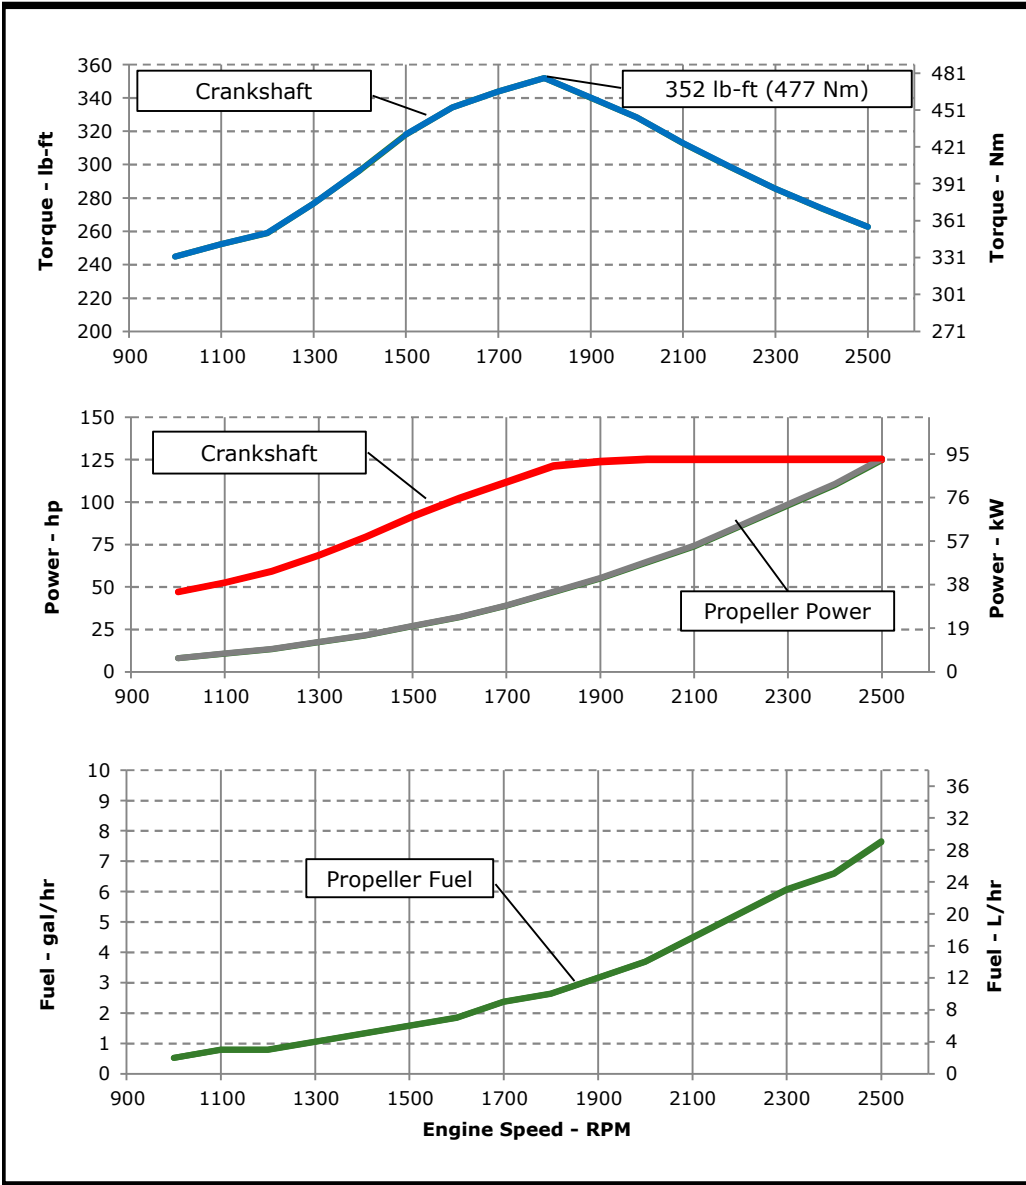

### REFERENCE CONDITIONS

Air Intake Restriction.....12 in.H<sub>2</sub>O (3 kPa)  
Exhaust Back Pressure..... 30 in.H<sub>2</sub>O (7.5 kPa)

Rated speed and power  
Gross power guaranteed within ±5% at ISO 8665/SAE J1228 and ISO 3046/SAE J1995  
Test conditions:  
77 °F (25 °C) air inlet temperature  
29.31 in.Hg (99 kPa) barometric pressure  
104 °F (40 °C) fuel inlet temperature  
0.853 fuel specific gravity @ 60 °F (15.5 °C)

Ambient air temperature is defined to be the temperature of ambient air close to operating vessel that is not influenced in any manner by operating characteristics of the vessel (free field temp).

Conversion factors: Power: kW = hp x 0.746  
Fuel: 1 gal = 7.1 lb, 1 L = 0.85 kg  
Torque: N·m = lb-ft x 1.356

All values from currently available data. Subject to manufacturing and measurement variations and to change without notice.  
Actual performance is subject to application and operation conditions outside of John Deere control.

All pressures shown in gauge pressure

**Notes:**  
**M2:** The M2 rating is for marine propulsion applications that operate between 3,000-5,000 hours per year and have load factors up to 65 percent. This rating is for applications that are in continuous use and use full power for no more than 16 hours of each 24 hours of operation. The remaining time of operation is at or below cruising speed.

**Possible Applications:** Short-range tugs and towboats (pool boats), long-range

Designed/Calibrated to meet:	Certified by:
<ul style="list-style-type: none"> <li>• IMO Exempt (&lt;130 kW)</li> <li>• EPA Marine Tier 3 Commercial (40 CFR 1042)</li> <li>• China Stage 2 Commercial Propulsion (GB15097-2016)</li> <li>• EU Stage IIIa Inland Waterways (NRMM 97/68/EC, as amended)</li> <li>• Recreational Craft Directive 2 (2013/53/EU)</li> </ul>	 26-Jan-22
Ref: Engine Emission Label	

Performance Curve: 4045TFM85\_D

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

# Engine Installation Criteria

## General Data

Model	4045TFM85			
Number of Cylinders	4			
Bore	106	mm	4.17	in
Stroke	127	mm	5.00	in
Displacement	4.5	L	275	in <sup>3</sup>
Compression Ratio	19.0:1			
Valves per Cylinder, Intake/Exhaust	1/1			
Combustion System	Direct injection			
Firing Order	1-3-4-2			
Engine Type	In line, 4 Cycle			
Aspiration	Turbocharged			
Aftercooling System	None			
Engine Crankcase Vent System	None, Offered as Accessory			

## Cooling System\*

Total Engine to Seawater Heat Rejection**	102	kW	5806	BTU/min
Coolant Flow	170	L/min	45	gal/min
Min. Coolant Pump Inlet Pressure	30.3	kPa	4.4	psi
Thermostat Start to Open	82	°C	180	°F
Thermostat Fully Open	94	°C	202	°F
Engine Coolant Capacity, HE	14	L	3.7	gal
Engine Coolant Capacity, KC	17	L	4.5	gal
Min. Coolant Fill Rate	12	L/min	3.2	gal/min
Min. Pressure Cap	69	kPa	10	psi
Max. External Coolant Restriction	40	kPa	5.8	psi
Normal Operation Max Top Tank Temperature	100	°C	212	°F
≤ 5% of Total Operating Time Top Tank Temperature	100-110	°C	212-230	°F
Absolute Max Top Tank Temperature	110	°C	230	°F
Recommended Fuel Cooler	3	kW	171	BTU/min
Engine Radiated Heat	8	kW	427	BTU/min

\* The cooling system should be capable of typical at ambient up to the maximum conditions in which the vessel will operate.

Typical operation is defined as the average load sustainable in the vessel over 10 min.

\*\* Reference 32 °C Sea Water Temperature

## Physical Data

Length to rear face of block	739	mm	29.1	in
Length to rear face of flywheel housing (SAE #3)	877	mm	34.5	in
Length maximum	1020	mm	40.2	in
Width maximum	808	mm	31.8	in
Height, crank centerline to top	625	mm	24.6	in
Height, crank centerline to bottom	287	mm	11.3	in
Weight, with oil, no coolant (includes engine, flywheel housing, flywheel, and electronics)	507	kg	1117	lb
Center of Gravity Location, X-axis From Rear Face of Block	250	mm	9.8	in
Center of Gravity Location, Y-axis Right of Crankshaft	-3.7	mm	-0.1	in
Center of Gravity Location, Z-axis Above Crankshaft	200	mm	7.9	in
Max. Allowable Static Bending Moment At Rear Face of Flywheel Housing (for installations up to 5-G)	814	Nm	600	lb-ft
Thrust Bearing Load Limit, Forward Continuous	2.2	kN	495	lbf
Thrust Bearing Load Limit, Forward Intermittent	4	kN	899	lbf
Thrust Bearing Load Limit, Rearward Continuous	1	kN	225	lbf
Thrust Bearing Load Limit, Rearward Intermittent	2	kN	450	lbf

## Electrical System

Min. Recommended Battery Capacity, 12V @32 °F (0 °C)	625	amps		
Min. Recommended Battery Capacity, 24V @32 °F (0 °C)	500	amps		
Starter Rolling Current, 12V @32 °F (0 °C)	920	amps		
Starter Rolling Current, 24V @32 °F (0 °C)	600	amps		
Min. Voltage at ECU during Cranking, 12V	6	volts		
Min. Voltage at ECU during Cranking, 24V	10	volts		
Max. Allowable Start Circuit Resistance, 12V	0.002	ohms		
Max. Allowable Start Circuit Resistance, 24V	0.0012	ohms		
Electrical Component Maximum Temperature Limit	125	°C	257	°F
Maximum ECU Temperature	105	°C	221	°F

Performance Curve: 4045TFM85\_D

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

# Engine Installation Criteria

## Fuel System

ECU Description	L16			
Fuel Injection Pump	HPCR			
Governor Type	Electronic			
Volumetric Fuel Consumption	29	L/hr	7.7	gal/hr
Mass Fuel Consumption	24.7	kg/hr	54	lb/hr
Total Fuel Volumetric Flow	79	L/hr	20.9	gal/hr
Total Fuel Mass Flow	67.2	kg/hr	148	lb/hr
Max. Fuel Inlet Restriction*	20	kPa	80	in.H2O
Max. Fuel Inlet Pressure	20	kPa	80	in.H2O
Max Fuel Return Pressure	20	kPa	80	in.H2O
Normal Operation Fuel Temperature	40	°C	104	°F
Max. Fuel Inlet Temperature	100	°C	212	°F
Min. Recommended Fuel Line Inside Diameter	4.78	mm	0.19	in
Min. Recommended Fuel Line Size	4 (-) AN			
Primary Fuel Filter	10 mic			
Secondary Fuel Filter	2 mic			

## Lubrication System

Oil Pressure at Rated Speed	330	kPa	48	psi
Oil Pressure at Low Idle (800rpm)**	200	kPa	29	psi
Max. Crankcase Pressure	2	kPa	8	in.H2O
Maximum Installed Angle, Front Down	0 deg			
Maximum Installed Angle, Front Up	12 deg			
Engine Angularity Limits Any Direction, Continuous***	30 deg			
Engine Angularity Limits Any Direction, Intermittent***	45 deg			

## Seawater Pump System

Seawater Pump Flow	133	L/min	35	gal/min
Max. Suction Lift	3	m	9.8	ft
Max. Outlet Pressure	140	kPa	20	psi
Max. Inlet Restriction	30	kPa	4	psi

\* With clean filters

\*\* With John Deere Plus-50 II™ 15w-40, not applicable with break in oil.

\*\*\* With 1932 option

## Air Intake System

Engine Air Flow	9.7	m <sup>3</sup> /min	342.6	ft <sup>3</sup> /min
Intake Manifold Pressure	151	kPa	21.9	psi
Manifold Air Temperature	160	°C	320	°F
Maximum Manifold Air Temperature	185	°C	365	°F
Max. Allowable Temperature Rise, Ambient	17	°C	30	°F
Air to Engine Inlet				
Max. Air Intake Restriction, Clean Air Cleaner	3	kPa	12	in.H2O
Max. Air Intake Restriction, Dirty Air Cleaner	6.25	kPa	25	in.H2O
Min. Ventilation Area	0.06	m <sup>2</sup>	92	in <sup>2</sup>

## Performance Data

Rated Power	93	kW	125	hp
Rated Speed	2500 RPM			
Peak Torque Speed	1800 RPM			
Low Idle Speed	600 RPM			
Rated Torque	356	Nm	263	ft-lb
Peak Torque	477	Nm	352	ft-lb
BMEP, Rated	994	kPa	144	psi
Rated Pferdestärke (metric hp)	101 ps			
Front Drive Capacity, Intermittent	542	Nm	400	lb-ft
Front Drive Capacity, Continuous	542	Nm	400	lb-ft

## Exhaust System

Exhaust Flow	22.5	m <sup>3</sup> /min	795	ft <sup>3</sup> /min
Exhaust Flow @ gas STP	9.1	m <sup>3</sup> /min	321	ft <sup>3</sup> /min
Exhaust Temperature	454	°C	849	°F
Max. Allowable Exhaust Restriction	7.5	kPa	30	in.H2O
Max. Shear on Turbocharger Exhaust Outlet	11	kg	24.3	lb
Max. Bending Moment on Turbocharger Exhaust Outlet	7	Nm	15.4	lb-ft
Min. Exhaust Pipe Diameter, Dry	76.2	mm	3.0	in
Min. Exhaust Pipe Diameter, Wet	88.9	mm	3.5	in

Performance Curve: 4045TFM85\_D

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

## Engine Installation Criteria

### Engine Performance Data Table

Engine Speed	Crank Power		Crank Torque		* Prop Power		* Prop Fuel		* Prop BSFC
	RPM	kW	hp	Nm	lb-ft	kW	hp	L/hr	gal/hr
<b>2500</b>	93	125	356	263	93	125	29	8	262
<b>2400</b>	93	125	371	274	82	110	25	7	257
<b>2300</b>	93	125	387	285	73	98	23	6	269
<b>2200</b>	93	125	405	299	64	86	20	5	265
<b>2100</b>	93	125	424	313	55	74	17	4	260
<b>2000</b>	93	125	445	328	48	64	14	4	257
<b>1900</b>	92	123	461	340	41	55	12	3	252
<b>1800</b>	90	121	477	352	35	47	10	3	251
<b>1700</b>	83	111	466	344	29	39	9	2	250
<b>1600</b>	76	102	453	334	24	32	7	2	253
<b>1500</b>	68	91	431	318	20	27	6	2	256
<b>1400</b>	59	79	402	296	16	21	5	1	263
<b>1300</b>	51	68	375	277	13	17	4	1	272
<b>1200</b>	44	59	351	259	10	13	3	1	284
<b>1100</b>	39	52	342	252	8	11	3	1	298
<b>1000</b>	35	47	332	245	6	8	2	1	314

\* Theoretical 3.0 exponent propeller curve , measured at flywheel

Performance Curve: 4045TFM85\_D

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.