




JOHN DEERE

ENGINE PERFORMANCE CURVE

Rating: **M1 - 325hp (242kW) @ 2100 RPM**
 Application: **Marine**

PowerTech™ 9.0L Engine
Model: 6090SFM85

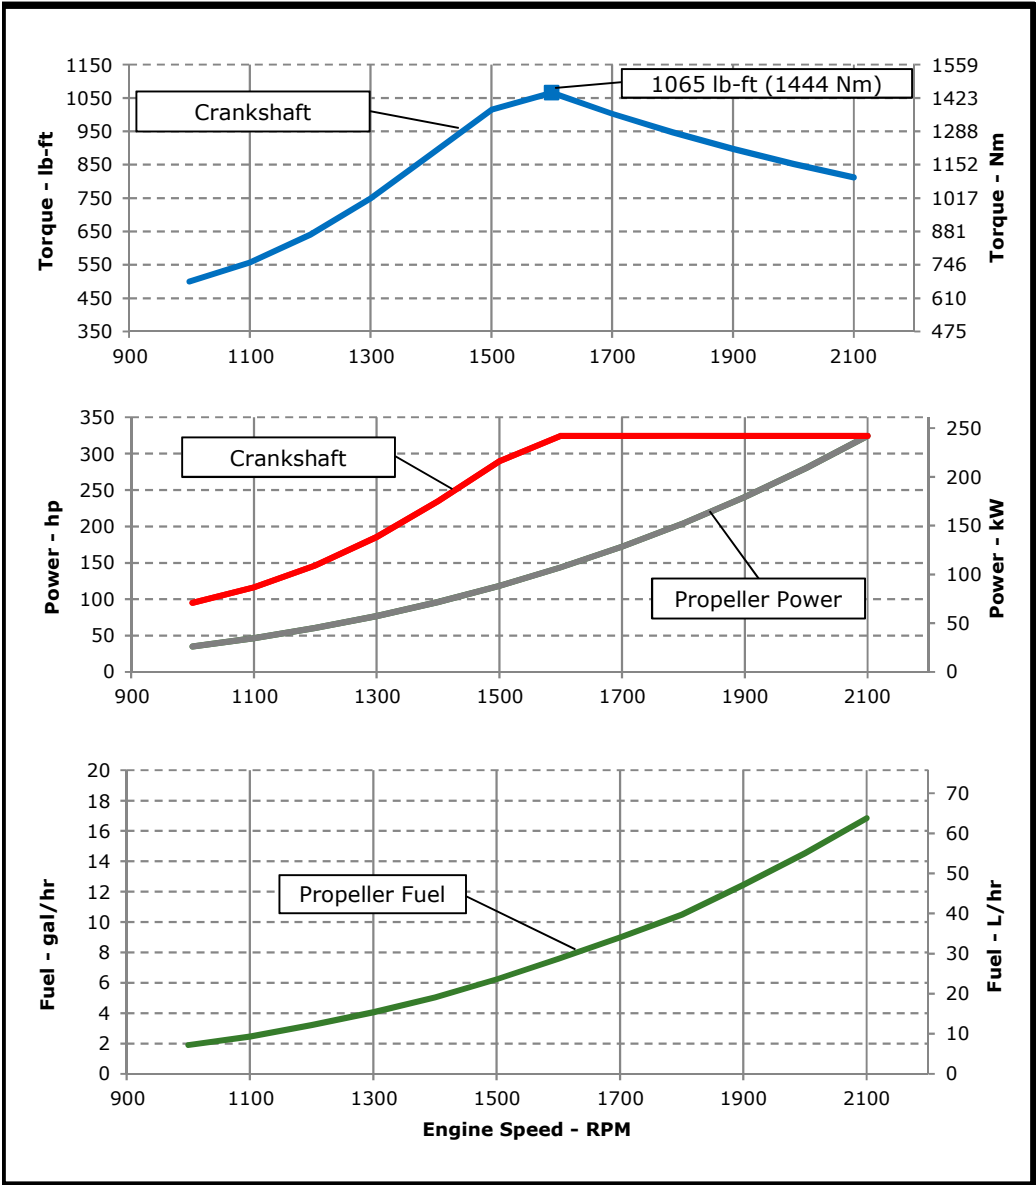

REFERENCE CONDITIONS

Air Intake Restriction.....12 in.H₂O (3 kPa)
 Exhaust Back Pressure..... 30 in.H₂O (7.5 kPa)

Rated speed and power
 Gross power guaranteed within ±5% at ISO 8665/SAE J1228 and ISO 3046/SAE J1995
 Test conditions:
 77 °F (25 °C) air inlet temperature
 29.31 in.Hg (99 kPa) barometric pressure
 104 °F (40 °C) fuel inlet temperature
 0.853 fuel specific gravity @ 60 °F (15.5 °C)

Ambient air temperature is defined to be the temperature of ambient air close to operating vessel that is not influenced in any manner by operating characteristics of the vessel (free field temp).

Conversion factors: Power: kW = hp x 0.746
 Fuel: 1 gal = 7.1 lb, 1 L = 0.85 kg
 Torque: N·m = lb-ft x 1.356

All values from currently available data. Subject to manufacturing and measurement variations and to change without notice.
 Actual performance is subject to application and operation conditions outside of John Deere control.

All pressures shown in gauge pressure

Notes:

M1: The **M1** rating is for marine propulsion applications that may operate up to 24 hours per day at uninterrupted full power and have load factors greater than 65 percent.

Possible applications: Line hauls tugs and towboats, fish and shrimp trawlers/draggers, and displacement hull fishing boats.

Designed/Calibrated to meet:	Certified by:
<ul style="list-style-type: none"> EPA Marine Tier 3 Commercial (40 CFR 1042) IMO Tier II Compliant (MARPOL Annex VI) EU Stage IIIa Inland Waterways (NRMM 97/68/EC, as amended) Recreational Craft Directive 2 (2013/53/EU) 	 9-Jun-20
Ref: Engine Emission Label	

Performance Curve: 6090SFM85_A

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

Engine Installation Criteria

General Data

Model	6090SFM85		
Number of Cylinders	6		
Bore	118.4 mm	4.66 in	
Stroke	136 mm	5.35 in	
Displacement	9.0 L	549 in ³	
Compression Ratio	16.3:1		
Valves per Cylinder, Intake/Exhaust	2/2		
Combustion System	Direct injection		
Firing Order	1-5-3-6-2-4		
Engine Type	In line, 4 Cycle		
Aspiration	Turbocharged and Aftercooled		
Aftercooling System	Seawater cooled		
Engine Crankcase Vent System	Closed		

Cooling System*

Jacket Water Heat Rejection**	186 kW	10587 BTU/min	
Aftercooler Heat Rejection	50.24 kW	2860 BTU/min	
Coolant Flow	280 L/min	74 gal/min	
Min. Coolant Pump Inlet Pressure	30.3 kPa	4.4 psi	
Thermostat Start to Open	82 °C	180 °F	
Thermostat Fully Open	94 °C	202 °F	
Engine Coolant Capacity, HE	38 L	10 gal	
Min. Coolant Fill Rate	12 L/min	3.2 gal/min	
Min. Pressure Cap	110.3 kPa	16 psi	
Max. External Coolant Restriction	40 kPa	5.8 psi	
Normal Operation Max Top Tank Temperature	100 °C	212 °F	
≤ 5% of Total Operating Time Top Tank Temperature	100-110 °C	212-230 °F	
Absolute Max Top Tank Temperature	110 °C	230 °F	
Recommended Fuel Cooler	3.9 kW	220 BTU/min	
Engine Radiated Heat	16 kW	911 BTU/min	

* The cooling system should be capable of typical at ambient up to the maximum conditions in which the vessel will operate.

Typical operation is defined as the average load sustainable in the vessel over 10 min.

** Reference 32 °C Sea Water Temperature

Physical Data

Length to rear face of block	1297 mm	51.1 in
Length to rear face of flywheel housing (SAE #2)	1415 mm	55.7 in
Length maximum	1712 mm	67.4 in
Width maximum	974 mm	38.3 in
Height, crank centerline to top	664 mm	26.1 in
Height, crank centerline to bottom	319 mm	12.6 in
Weight, with oil, no coolant (includes engine, flywheel housing, flywheel, and electronics)	1056 kg	2327 lb
Center of Gravity Location, X-axis From Rear Face of Block	408 mm	16.1 in
Center of Gravity Location, Y-axis Right of Crankshaft	-38 mm	-1.5 in
Center of Gravity Location, Z-axis Above Crankshaft	200 mm	7.9 in
Max. Allowable Static Bending Moment At Rear Face of Flywheel Housing (for installations up to 5-G)	814 Nm	600 lb-ft
Thrust Bearing Load Limit, Forward Continuous	8.6 kN	1933 lbf
Thrust Bearing Load Limit, Forward Intermittent	13 kN	2923 lbf
Thrust Bearing Load Limit, Rearward Continuous	4 kN	899 lbf
Thrust Bearing Load Limit, Rearward Intermittent	6 kN	1349 lbf

Electrical System

Min. Recommended Battery Capacity, 12V @32 °F (0 °C)	1100 amps
Min. Recommended Battery Capacity, 24V @32 °F (0 °C)	750 amps
Starter Rolling Current, 12V @32 °F (0 °C)	500 amps
Starter Rolling Current, 24V @32 °F (0 °C)	300 amps
Min. Voltage at ECU during Cranking, 12V	6 volts
Min. Voltage at ECU during Cranking, 24V	10 volts
Max. Allowable Start Circuit Resistance, 12V	0.002 ohms
Max. Allowable Start Circuit Resistance, 24V	0.0012 ohms
Electrical Component Maximum Temperature Limit	125 °C 257 °F
Maximum ECU Temperature	105 °C 221 °F

Performance Curve: 6090SFM85_A

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

Engine Installation Criteria

Fuel System

ECU Description	L14			
Fuel Injection Pump	HPCR			
Governor Type	Electronic			
Volumetric Fuel Consumption	63.8	L/hr	16.8	gal/hr
Mass Fuel Consumption	54.2	kg/hr	120	lb/hr
Total Fuel Volumetric Flow	251	L/hr	66.3	gal/hr
Total Fuel Mass Flow	213	kg/hr	470	lb/hr
Max. Fuel Inlet Restriction*	20	kPa	80	in.H2O
Max. Fuel Inlet Pressure	20	kPa	80	in.H2O
Max Fuel Return Pressure	20	kPa	80	in.H2O
Normal Operation Fuel Temperature	40	°C	104	°F
Max. Fuel Inlet Temperature	100	°C	212	°F
Min. Recommended Fuel Line Inside Diameter	8.53	mm	0.34	in
Min. Recommended Fuel Line Size	6 (-) AN			
Primary Fuel Filter	10 mic			
Secondary Fuel Filter	2 mic			

Lubrication System

Oil Pressure at Rated Speed	270	kPa	39	psi
Oil Pressure at Low Idle (650rpm)**	145	kPa	21	psi
Max. Crankcase Pressure	2	kPa	8	in.H2O
Maximum Installed Angle, Front Down	0 deg			
Maximum Installed Angle, Front Up	12 deg			
Engine Angularity Limits Any Direction, Continuous***	20 deg			
Engine Angularity Limits Any Direction, Intermittent***	30 deg			

Seawater Pump System

Seawater Pump Flow	363	L/min	96	gal/min
Max. Suction Lift	3	m	9.8	ft
Max. Outlet Pressure	140	kPa	20	psi
Max. Inlet Restriction	30	kPa	4	psi

* With clean filters

** With John Deere Plus-50 II™ 15w-40, not applicable with break in oil.

*** With 1932 option

Air Intake System

Engine Air Flow	21	m ³ /min	741.6	ft ³ /min
Intake Manifold Pressure	143.7	kPa	20.8	psi
Manifold Air Temperature	35	°C	95	°F
Maximum Manifold Air Temperature	67	°C	153	°F
Max. Allowable Temperature Rise, Ambient	17	°C	30	°F
Air to Engine Inlet				
Max. Air Intake Restriction, Clean Air Cleaner	3	kPa	12	in.H2O
Max. Air Intake Restriction, Dirty Air Cleaner	6.25	kPa	25	in.H2O
Min. Ventilation Area	0.129	m ²	200	in ²
Max. CAC Delta Pressure	8.2	kPa	32.9	in.H2O

Performance Data

Rated Power	242	kW	325	hp
Rated Speed	2100 RPM			
Peak Torque Speed	1600 RPM			
Low Idle Speed	650 RPM			
Rated Torque	1100	Nm	812	ft-lb
Peak Torque	1444	Nm	1065	ft-lb
BMEP, Rated	1537	kPa	223	psi
Rated Pferdestärke (metric hp)	329 ps			
Front Drive Capacity, Intermittent	955	Nm	704	lb-ft
Front Drive Capacity, Continuous	955	Nm	704	lb-ft

Exhaust System

Exhaust Flow	44.34	m ³ /min	1566	ft ³ /min
Exhaust Flow @ gas STP	20.2	m ³ /min	713	ft ³ /min
Exhaust Temperature	384	°C	723	°F
Max. Allowable Exhaust Restriction	7.5	kPa	30	in.H2O
Max. Shear on Turbocharger Exhaust Outlet	11	kg	24.3	lb
Max. Bending Moment on Turbocharger Exhaust Outlet	7	Nm	15.4	lb-ft
Min. Exhaust Pipe Diameter, Dry	114.3	mm	4.5	in
Min. Exhaust Pipe Diameter, Wet	127	mm	5.0	in

Performance Curve: 6090SFM85_A

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

Engine Installation Criteria

Engine Performance Data Table

Engine Speed	Crank Power		Crank Torque		* Prop Power		* Prop Fuel		* Prop BSFC
	RPM	kW	hp	Nm	lb-ft	kW	hp	L/hr	gal/hr
2100	242	324	1100	811	242	324	63.8	16.8	224
2000	242	324	1155	852	209	280	55.0	14.5	224
1900	242	324	1216	897	179	240	47.1	12.4	224
1800	242	325	1284	947	152	204	39.7	10.5	221
1700	242	324	1359	1002	128	172	34.0	9.0	225
1600	242	324	1444	1065	107	144	28.7	7.6	228
1500	216	290	1375	1014	88	118	23.6	6.2	227
1400	175	235	1195	881	72	96	19.1	5.0	226
1300	138	185	1015	748	57	77	15.4	4.1	227
1200	109	146	868	640	45	61	12.2	3.2	229
1100	87	117	755	557	35	47	9.3	2.5	228
1000	71	95	678	500	26	35	7.2	1.9	235

* Theoretical 3.0 exponent propeller curve , measured at flywheel

Performance Curve: 6090SFM85_A

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.