






JOHN DEERE

ENGINE PERFORMANCE CURVE

Rating: **M4 - 575hp (429kW) @ 2100 RPM**
 Application: **Marine**

PowerTech™ 13.5L Engine
Model: 6135AFM85

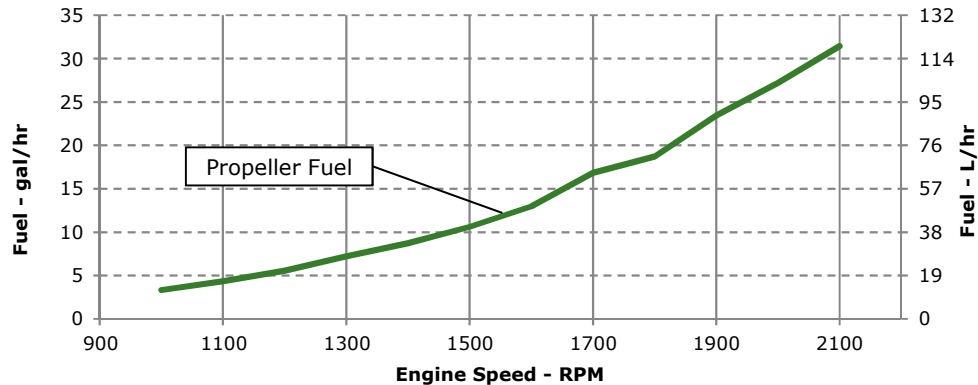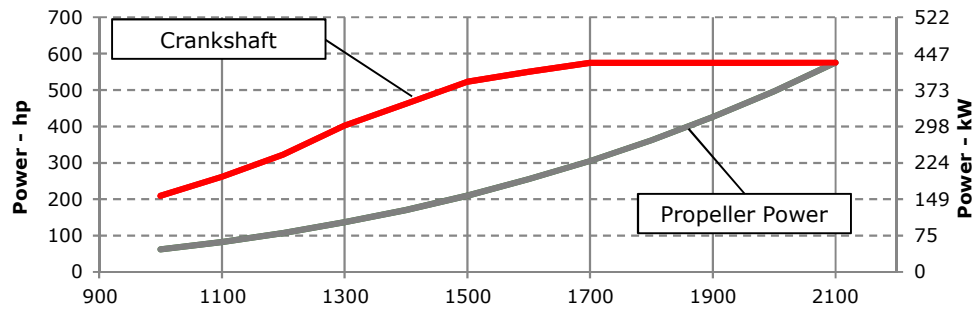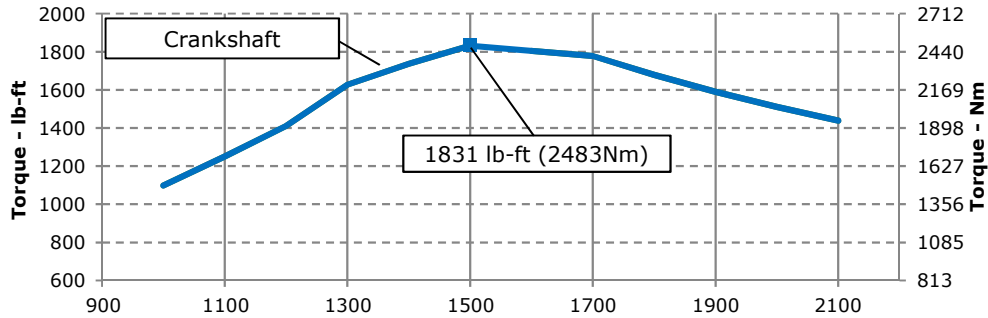

REFERENCE CONDITIONS

Air Intake Restriction.....12 in.H₂O (3 kPa)
 Exhaust Back Pressure..... 30 in.H₂O (7.5 kPa)

Rated speed and power
 Gross power guaranteed within ±5% at ISO 8665/SAE J1228 and ISO 3046/SAE J1995
 Test conditions:
 77 °F (25 °C) air inlet temperature
 29.31 in.Hg (99 kPa) barometric pressure
 104 °F (40 °C) fuel inlet temperature
 0.853 fuel specific gravity @ 60 °F (15.5 °C)

Ambient air temperature is defined to be the temperature of ambient air close to operating vessel that is not influenced in any manner by operating characteristics of the vessel (free field temp).

Conversion factors:
 Power: kW = hp x 0.746
 Fuel: 1 gal = 7.1 lb, 1 L = 0.85 kg
 Torque: N·m = lb-ft x 1.356

All values from currently available data. Subject to manufacturing and measurement variations and to change without notice.
 Actual performance is subject to application and operation conditions outside of John Deere control.

All pressures shown in gauge pressure

Notes:

M4: The **M4** rating is for marine propulsion applications that typically operate between 1,000-3,000 hours per year and have load factors below 40 percent. This rating is for applications that use full power no more than 1 hour out of each 12 hours of operation. The remaining time of operation is at or below cruising speed.

Possible applications: Inshore crew boats, charter fishing boats, pilot boats, dive boats, and planning hull commercial fishing boats.

Designed/Calibrated to meet:	Certified by:
<ul style="list-style-type: none"> EPA Marine Tier 3 Commercial (40 CFR 1042) IMO Tier II Compliant (MARPOL Annex VI) EU Stage IIIa Inland Waterways (NRMM 97/68/EC, as amended) Recreational Craft Directive 2 (2013/53/EU) 	
Ref: Engine Emission Label	

Performance Curve: 6135AFM85_D

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

Engine Installation Criteria

General Data

Model	6135AFM85		
Number of Cylinders	6		
Bore	132 mm	5.20	in
Stroke	165 mm	6.50	in
Displacement	13.5 L	824	in ³
Compression Ratio	16.0:1		
Valves per Cylinder, Intake/Exhaust	2/2		
Combustion System	Direct injection		
Firing Order	1-5-3-6-2-4		
Engine Type	In line, 4 Cycle		
Aspiration	Turbocharged and Aftercooled		
Aftercooling System	Engine coolant		
Engine Crankcase Vent System	Closed		

Cooling System*

Engine Coolant Heat Rejection**	436 kW	24834	BTU/min
Max. Pressure Drop Across Keel Cooler	40 kPa	5.8	psi
Coolant Flow	356 L/min	94	gal/min
Min. Coolant Pump Inlet Pressure	30.3 kPa	4.4	psi
Thermostat Start to Open	72 °C	161	°F
Thermostat Fully Open	82 °C	179	°F
Engine Coolant Capacity, HE	44 L	11.6	gal
Engine Coolant Capacity, KC	42 L	11.1	gal
Min. Coolant Fill Rate	12 L/min	3.2	gal/min
Min. Pressure Cap	110.3 kPa	16	psi
Max. External Coolant Restriction	40 kPa	5.8	psi
Normal Operation Max Top Tank Temperature	100 °C	212	°F
≤ 5% of Total Operating Time Top Tank Temperature	100-105 °C	212-230	°F
Absolute Max Top Tank Temperature	105 °C	221	°F
Recommended Fuel Cooler	2 kW	95	BTU/min
Engine Radiated Heat	30 kW	1701	BTU/min

* The cooling system should be capable of typical at ambient up to the maximum conditions in which the vessel will operate.

Typical operation is defined as the average load sustainable in the vessel over 10 min.

** Reference 32 °C Sea Water Temperature

Physical Data

Length to rear face of block	1316 mm	51.8	in
Length to rear face of flywheel housing (SAE #1)	1425 mm	56.1	in
Length maximum	1800 mm	70.9	in
Width maximum	1062 mm	41.8	in
Height, crank centerline to top	818 mm	32.2	in
Height, crank centerline to bottom	364 mm	14	in
Weight, with oil, no coolant (includes engine, flywheel housing, flywheel, and electronics)	1410 kg	3108	lb
Center of Gravity Location, X-axis From Rear Face of Block	516 mm	20.3	in
Center of Gravity Location, Y-axis Right of Crankshaft	5 mm	0.2	in
Center of Gravity Location, Z-axis Above Crankshaft	239 mm	9.4	in
Max. Allowable Static Bending Moment At Rear Face of Flywheel Housing (for installations up to 5-G)	814 Nm	600	lb-ft
Thrust Bearing Load Limit, Forward Continuous	5.4 kN	1214	lbf
Thrust Bearing Load Limit, Forward Intermittent	8.1 kN	1821	lbf
Thrust Bearing Load Limit, Rearward Continuous	2.5 kN	562	lbf
Thrust Bearing Load Limit, Rearward Intermittent	4 kN	899	lbf

Electrical System

Min. Recommended Battery Capacity, 12V @32 °F (0 °C)	1900	amps
Min. Recommended Battery Capacity, 24V @32 °F (0 °C)	925	amps
Starter Rolling Current, 12V @32 °F (0 °C)	920	amps
Starter Rolling Current, 24V @32 °F (0 °C)	600	amps
Min. Voltage at ECU during Cranking, 12V	6	volts
Min. Voltage at ECU during Cranking, 24V	10	volts
Max. Allowable Start Circuit Resistance, 12V	0.0012	ohms
Max. Allowable Start Circuit Resistance, 24V	0.002	ohms
Electrical Component Maximum Temperature Limit	125 °C	257 °F
Maximum ECU Temperature	105 °C	221 °F

Performance Curve: 6135AFM85_D

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

Engine Installation Criteria

Fuel System

ECU Description	L15			
Fuel Injection Pump	Unit Injection			
Governor Type	Electronic			
Volumetric Fuel Consumption	119	L/hr	31.4	gal/hr
Mass Fuel Consumption	101	kg/hr	223	lb/hr
Total Fuel Volumetric Flow	201	L/hr	53.1	gal/hr
Total Fuel Mass Flow	170	kg/hr	375	lb/hr
Max. Fuel Inlet Restriction*	30	kPa	120	in.H2O
Max. Fuel Inlet Pressure	24	kPa	96	in.H2O
Max Fuel Return Pressure	35	kPa	141	in.H2O
Normal Operation Fuel Temperature	40	°C	104	°F
Max. Fuel Inlet Temperature	80	°C	176	°F
Min. Recommended Fuel Line Inside Diameter	6.79	mm	0.27	in
Min. Recommended Fuel Line Size	5 (-) AN			
Primary Fuel Filter	10 mic			
Secondary Fuel Filter	2 mic			

Lubrication System

Oil Pressure at Rated Speed	317	kPa	46	psi
Oil Pressure at Low Idle (600rpm)**	157	kPa	23	psi
Max. Crankcase Pressure	2	kPa	8	in.H2O
Maximum Installed Angle, Front Down	0 deg			
Maximum Installed Angle, Front Up	12 deg			
Engine Angularity Limits Any Direction, Continuous***	20 deg			
Engine Angularity Limits Any Direction, Intermittent***	30 deg			

Seawater Pump System

Seawater Pump Flow	382	L/min	101	gal/min
Max. Suction Lift	3	m	9.8	ft
Max. Outlet Pressure	140	kPa	20	psi
Max. Inlet Restriction	30	kPa	4	psi

* With clean filters

** With John Deere Plus-50 II™ 15w-40, not applicable with break in oil.

*** With 1904 option

Air Intake System

Engine Air Flow	40.3	m ³ /min	1423	ft ³ /min
Intake Manifold Pressure	275	kPa	39.9	psi
Manifold Air Temperature	96	°C	205	°F
Maximum Manifold Air Temperature	130	°C	266	°F
Max. Allowable Temperature Rise, Ambient	17	°C	30	°F
Air to Engine Inlet				
Max. Air Intake Restriction, Clean Air Cleaner	3	kPa	12	in.H2O
Max. Air Intake Restriction, Dirty Air Cleaner	6.25	kPa	25	in.H2O
Min. Ventilation Area	0.248	m ²	384	in ²

Performance Data

Rated Power	429	kW	575	hp
Rated Speed	2100 RPM			
Peak Torque Speed	1500 RPM			
Low Idle Speed	600 RPM			
Rated Torque	1951	Nm	1439	ft-lb
Peak Torque	2483	Nm	1831	ft-lb
BMEP, Rated	1816	kPa	263	psi
Rated Pferdestärke (metric hp)	583 ps			
Front Drive Capacity, Intermittent	542	Nm	400	lb-ft
Front Drive Capacity, Continuous	542	Nm	400	lb-ft

Exhaust System

Exhaust Flow	92.3	m ³ /min	3260	ft ³ /min
Exhaust Flow @ gas STP	38.1	m ³ /min	1345	ft ³ /min
Exhaust Temperature	418	°C	784	°F
Max. Allowable Exhaust Restriction	7.5	kPa	30	in.H2O
Max. Shear on Turbocharger Exhaust Outlet	11	kg	24.3	lb
Max. Bending Moment on Turbocharger Exhaust Outlet	7	Nm	15.4	lb-ft
Min. Exhaust Pipe Diameter, Dry	152.4	mm	6.0	in
Min. Exhaust Pipe Diameter, Wet	165.1	mm	6.5	in

Performance Curve: 6135AFM85_D

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

Engine Installation Criteria

Engine Performance Data Table

Engine Speed	Crank Power		Crank Torque		* Prop Power		* Prop Fuel		* Prop BSFC
	RPM	kW	hp	Nm	lb-ft	kW	hp	L/hr	gal/hr
2100	429	575	1951	1439	429	575	119	31	236
2000	429	575	2048	1510	371	497	103	27	236
1900	429	575	2156	1590	318	426	89	23	238
1800	429	575	2276	1679	270	362	71	19	223
1700	429	575	2410	1777	228	305	64	17	238
1600	410	550	2447	1805	190	254	49	13	220
1500	390	523	2483	1831	156	210	40	11	218
1400	345	463	2353	1735	127	170	33	9	221
1300	300	402	2204	1626	102	136	27	7	228
1200	240	322	1911	1410	80	107	21	6	223
1100	195	262	1695	1250	62	83	17	4	227
1000	156	209	1489	1098	46	62	13	3	231

* Theoretical 3.0 exponent propeller curve , measured at flywheel

Performance Curve: 6135AFM85_D

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.